BLADE PLATFORM FITS FOR LC300



INFORMATION

The information in these installation instructions is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely install equipment in your vehicle. These procedures should not be attempted by individuals without professional expertise or by "do-it-yourselfers."

WARNING ⚠

It is critical that all products are properly and securely assembled and attached to your vehicle. Improper attachment could result in an automobile accident, causing serious bodily injury or death. You are responsible for assembling and securing all components to your vehicle, checking the attachments prior to use, and periodically inspecting the products for adjustment, wear, and damage.
Therefore, you must read and understand all instructions and precautions supplied with your product prior to installation or use. If you do not understand all instructions and cautions, or if you lack mechanical experience and are not thoroughly familiar with the installation procedures, you should have the product installed by a professional installer or other qualified personnel.

NOTE: We will not be responsible for any damage caused by the failure to install the product according to these instructions. If you have any questions about the installation of this product, please contact us for assistance.

PARTS LIST

parts No.	picture	pcs
Ⓐ	 Front plate	1
Ⓑ	 Left & Right Side Plate	Lx1 Rx1
Ⓒ	 Back plate	1
Ⓓ	 Middle Plate	7
Ⓔ	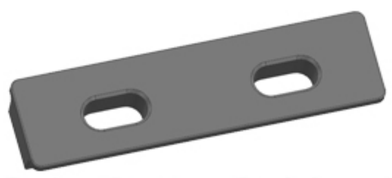 Rain Gutter Rubber Pad	6
Ⓕ	 Hole bracket	FLx1 FRx1
Ⓖ	 Hole bracket	MLx1 MRx1
Ⓗ	 Hole bracket	RLx1 RRx1
Ⓘ	 M8*40 Torx Screws	12

parts No.	picture	pcs
Ⓙ	 M8*20 Torx Screws	48
Ⓚ	 M8 Flat Washer	60
Ⓛ	 M8 nut	20
Ⓜ	 M8 Spring washer	48
Ⓝ	 T45 wrench	1
Ⓞ	Middle plate rubber strip 2000mm	14
Ⓟ	Front plate rubber strip 1300mm	1
Ⓠ	Adhesive sealant	1

Note: Left front FL, right front FR, left middle ML, right middle MR, left back RL, right back RR

Install the front plate rubber strip

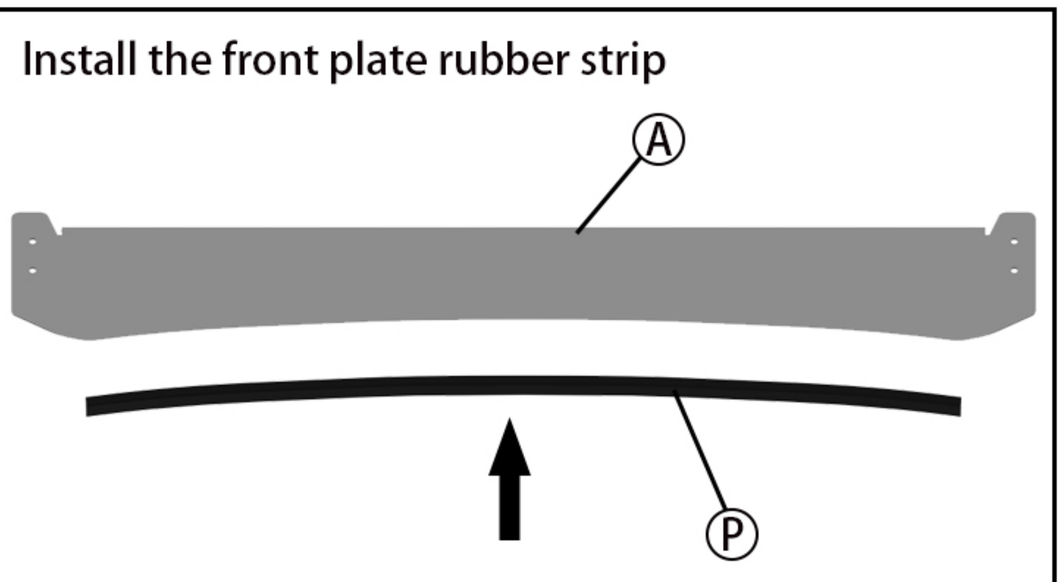

Install the middle plate rubber strip

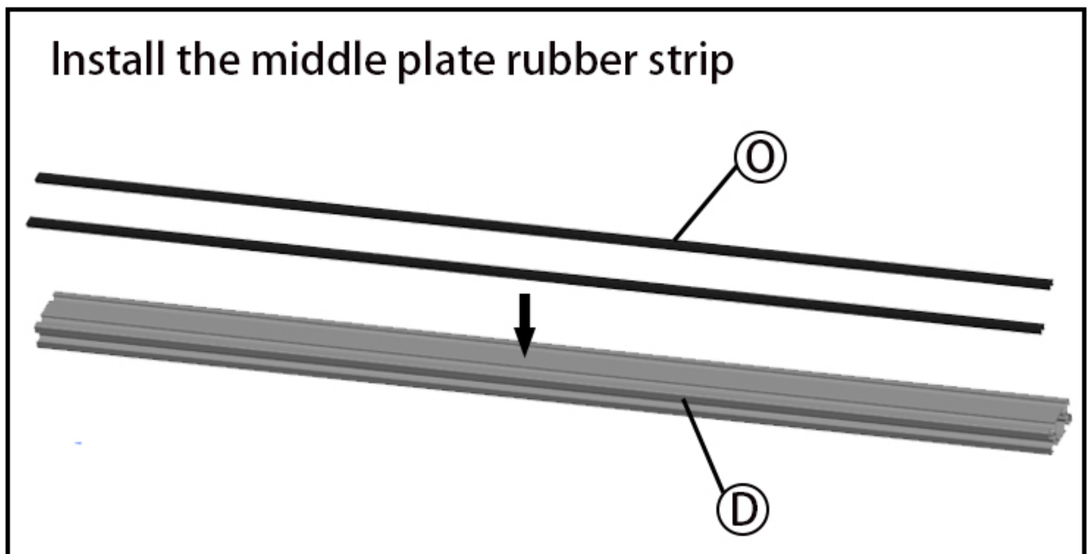

INSTALLATION STEPS

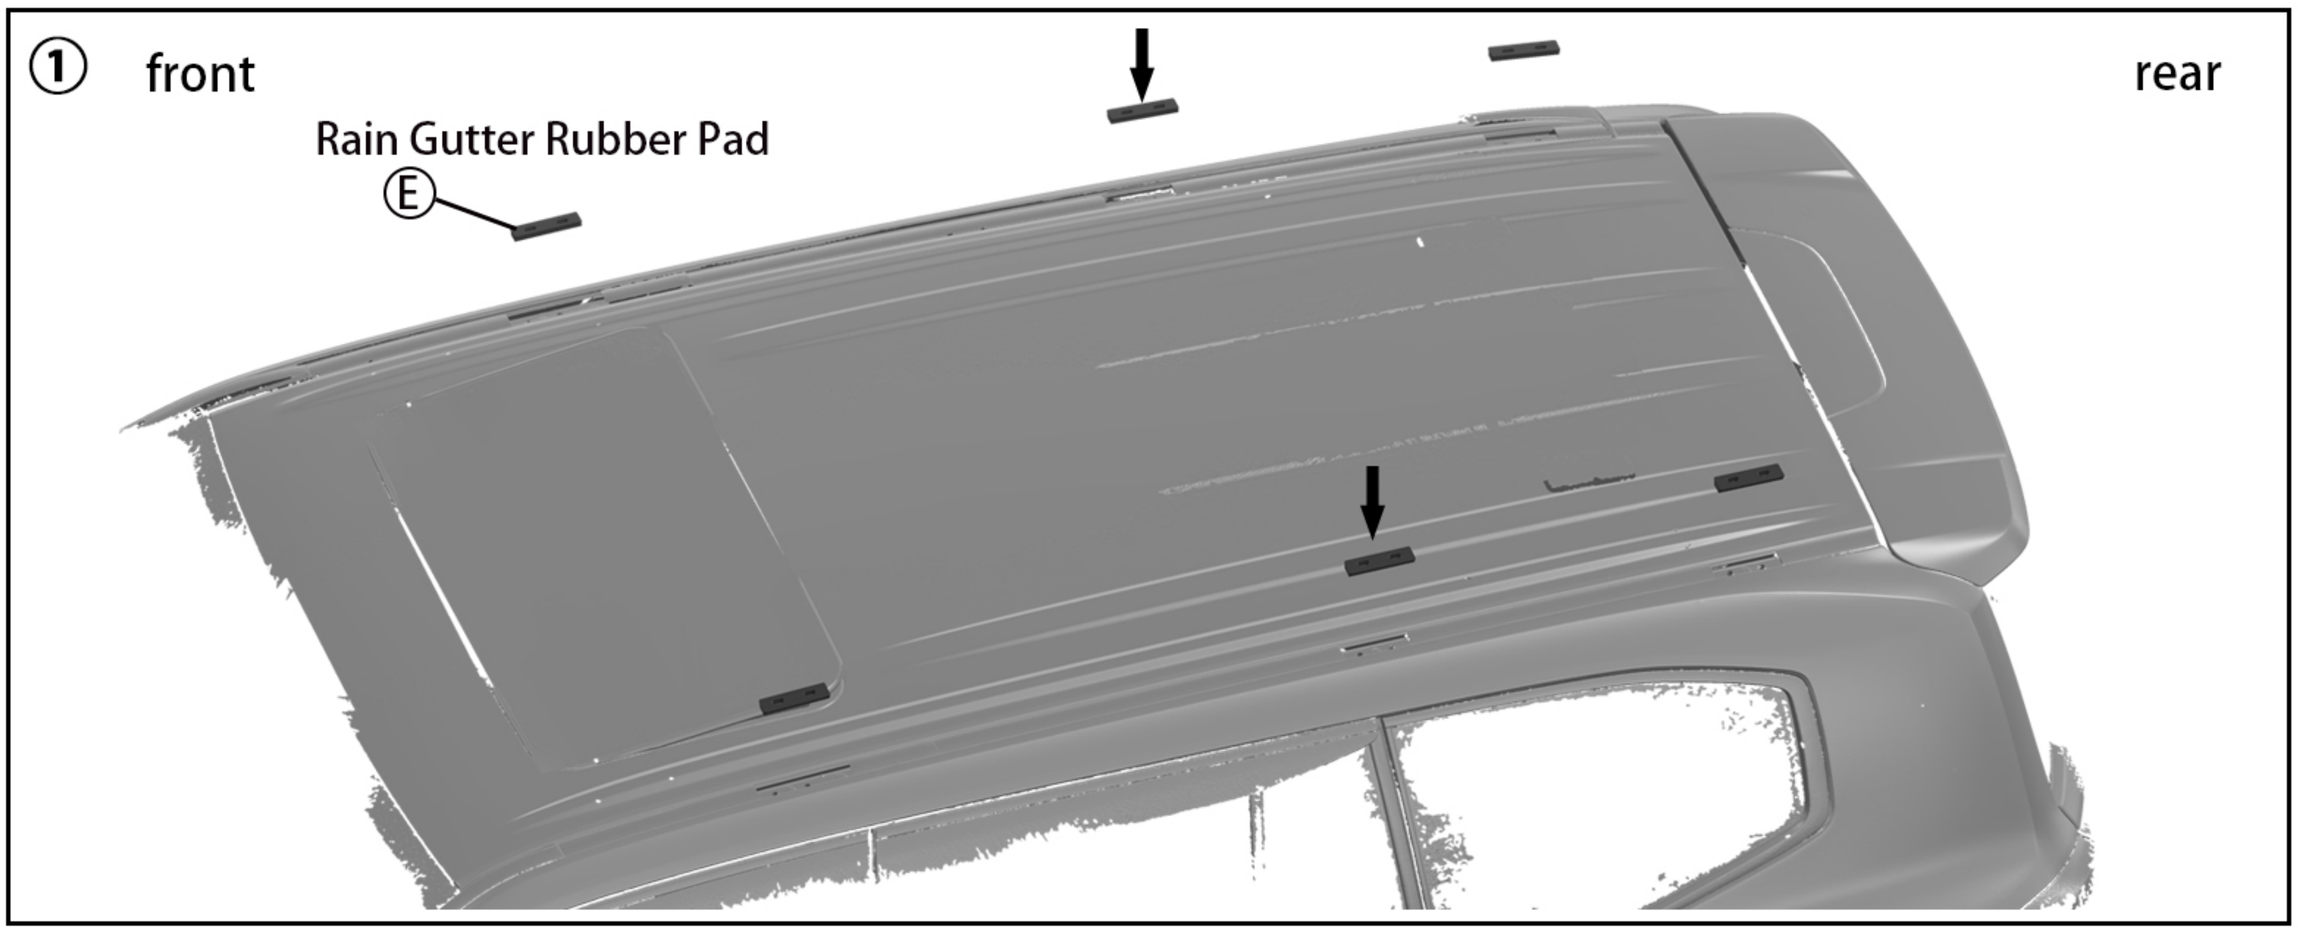

Place the rain gutter rubber pad (E) on the roof of the car.

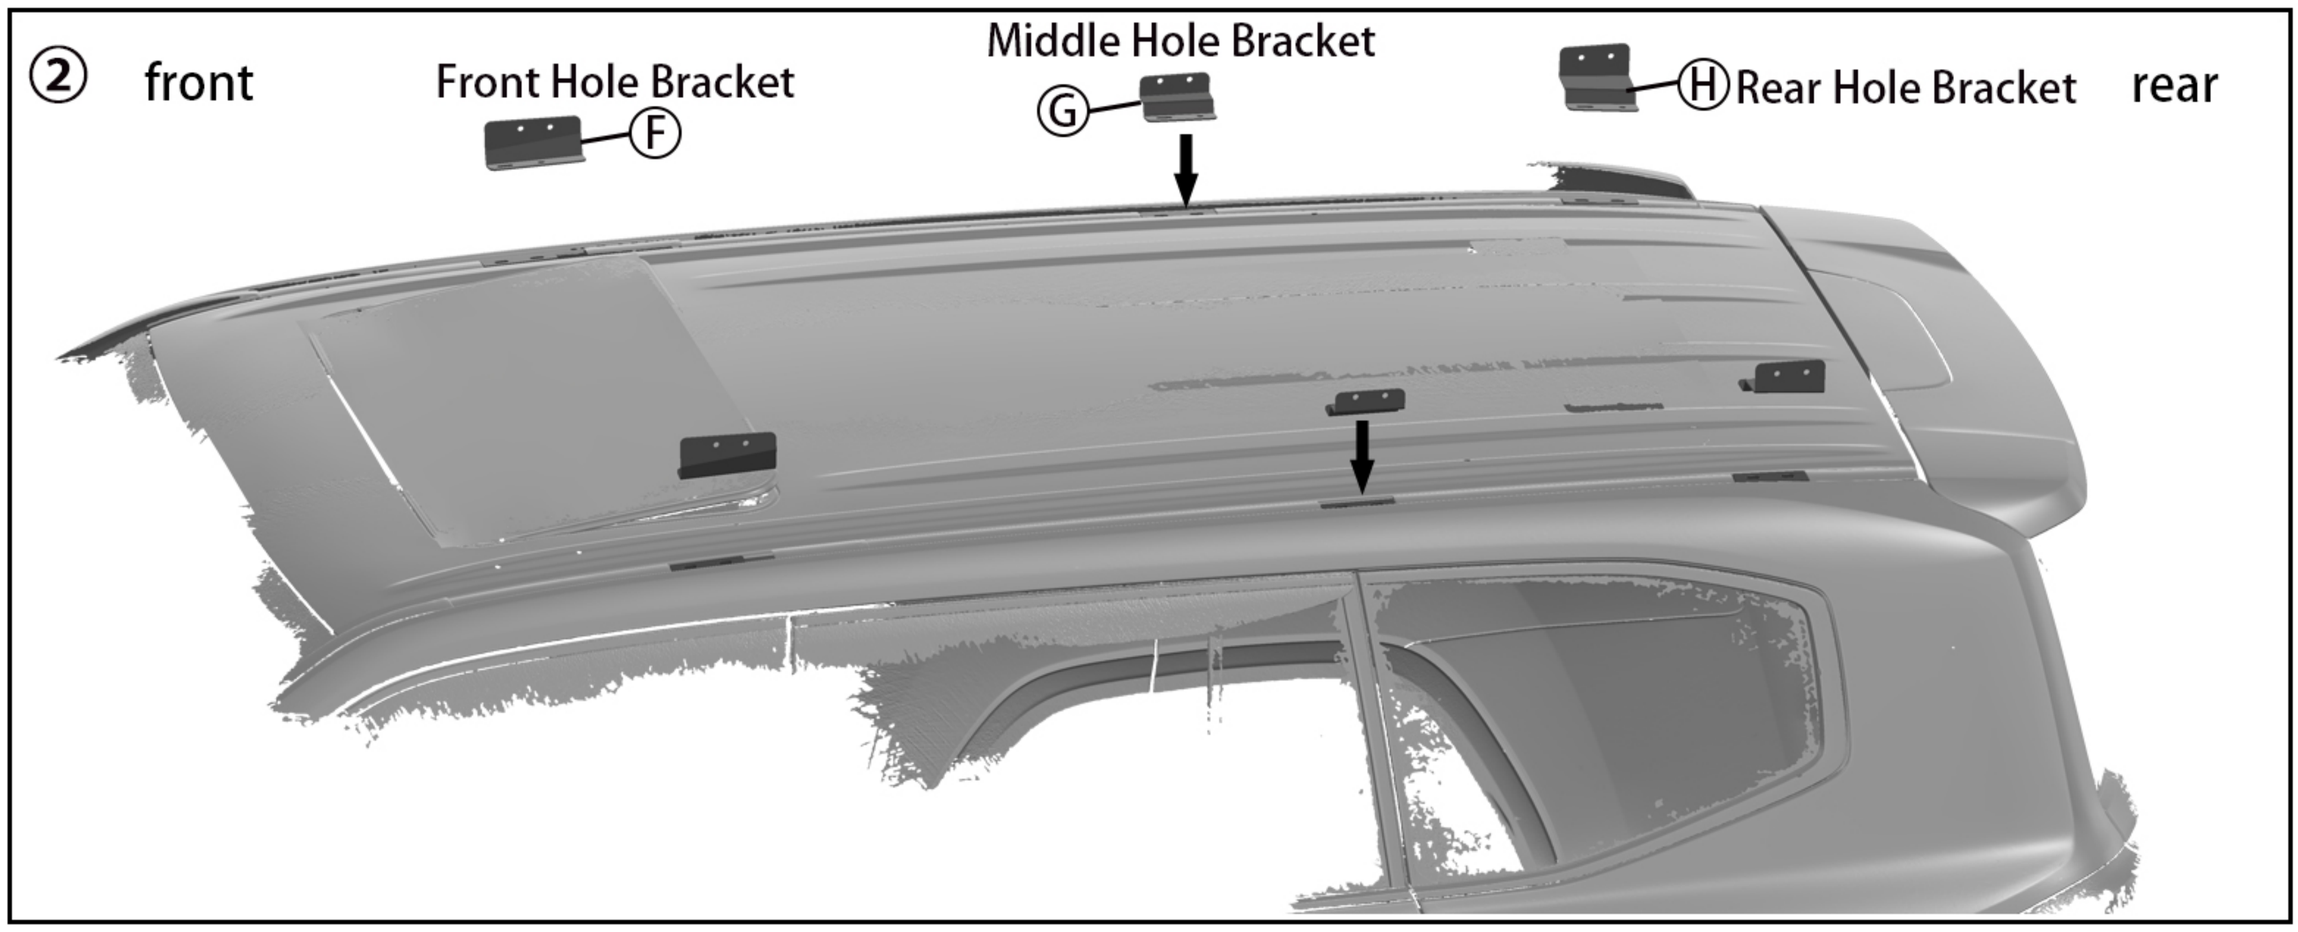

Place the hole bracket (F,G,H) on the rain gutter rubber pad, align it with the hole position

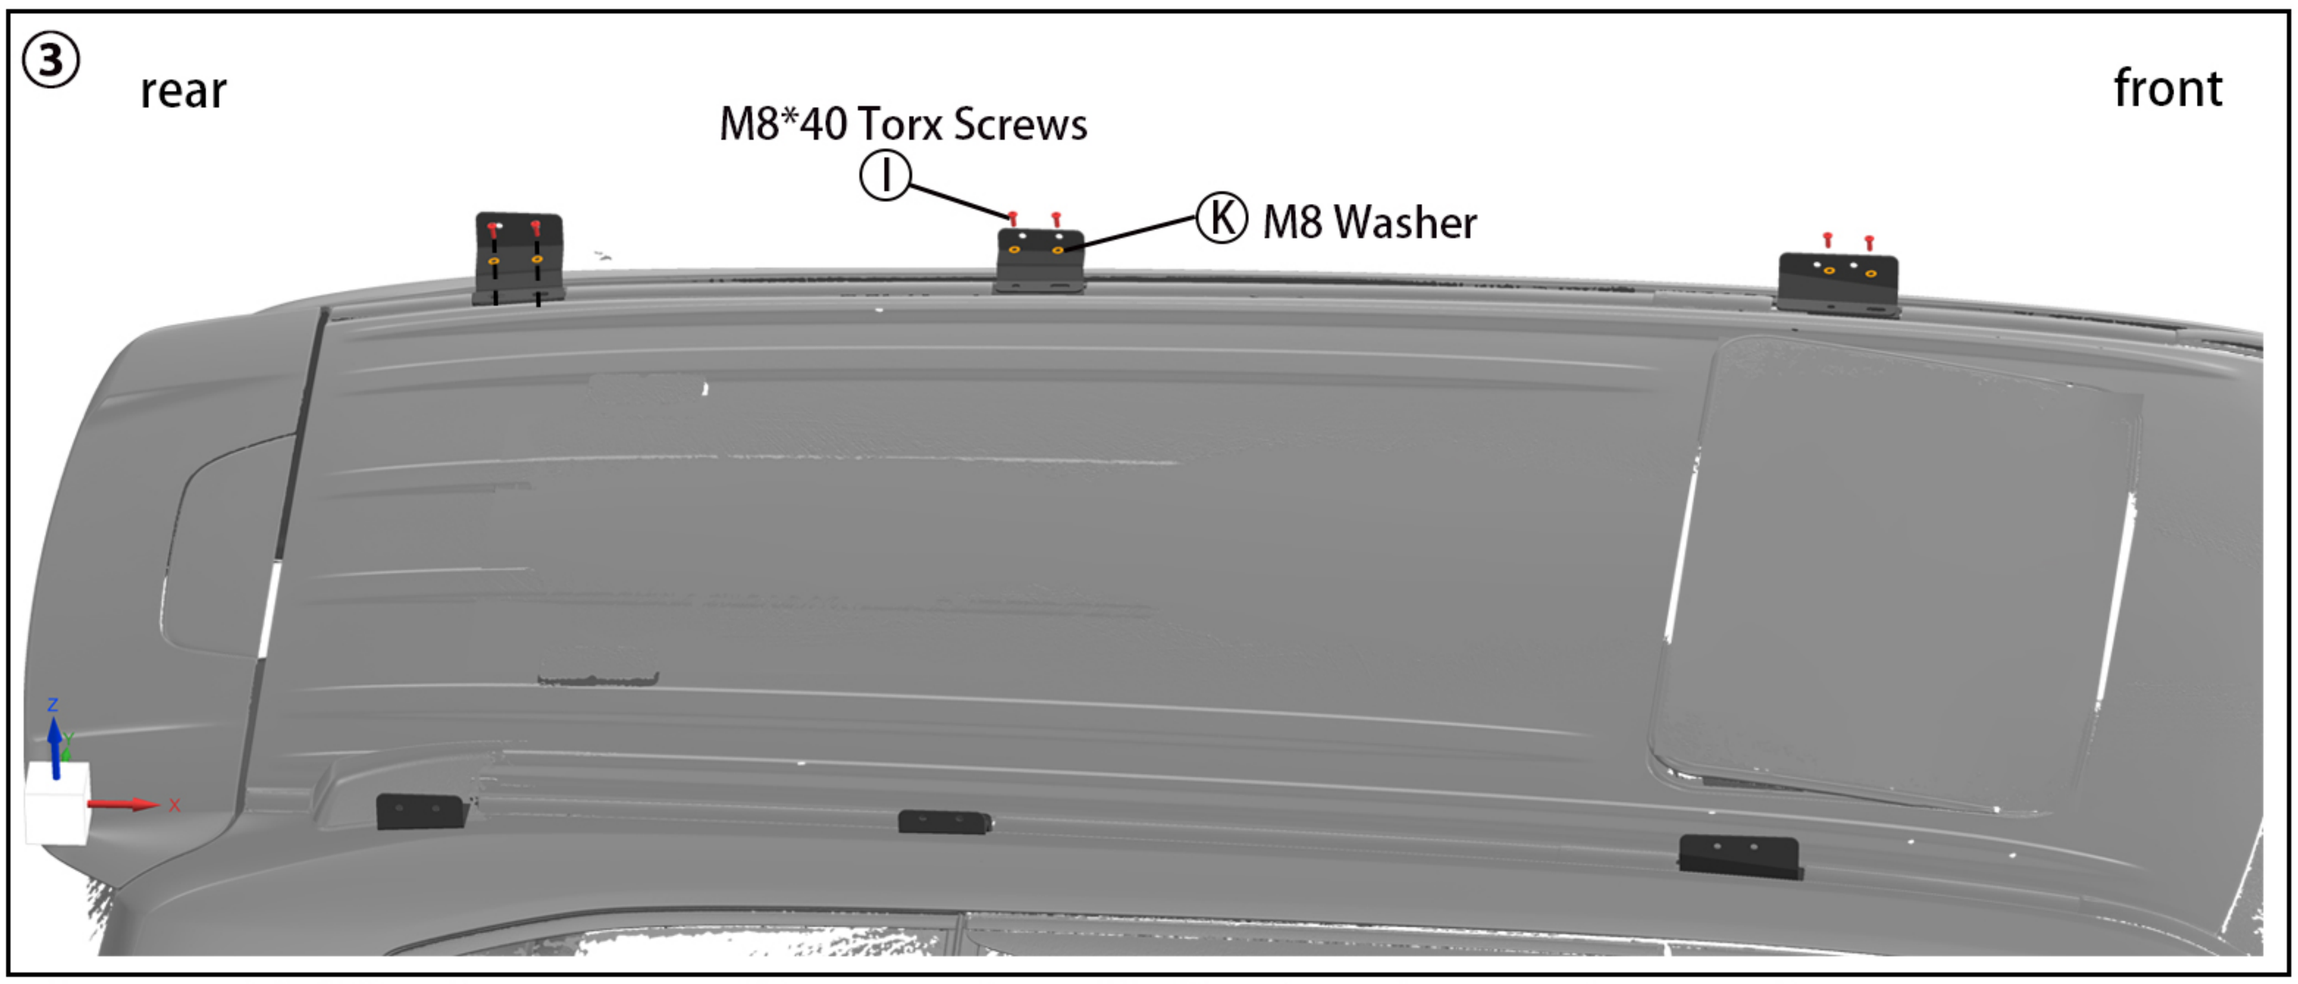

Secure with M8x40 torx screws (I) and washers (K). (Apply sealant on the screw)

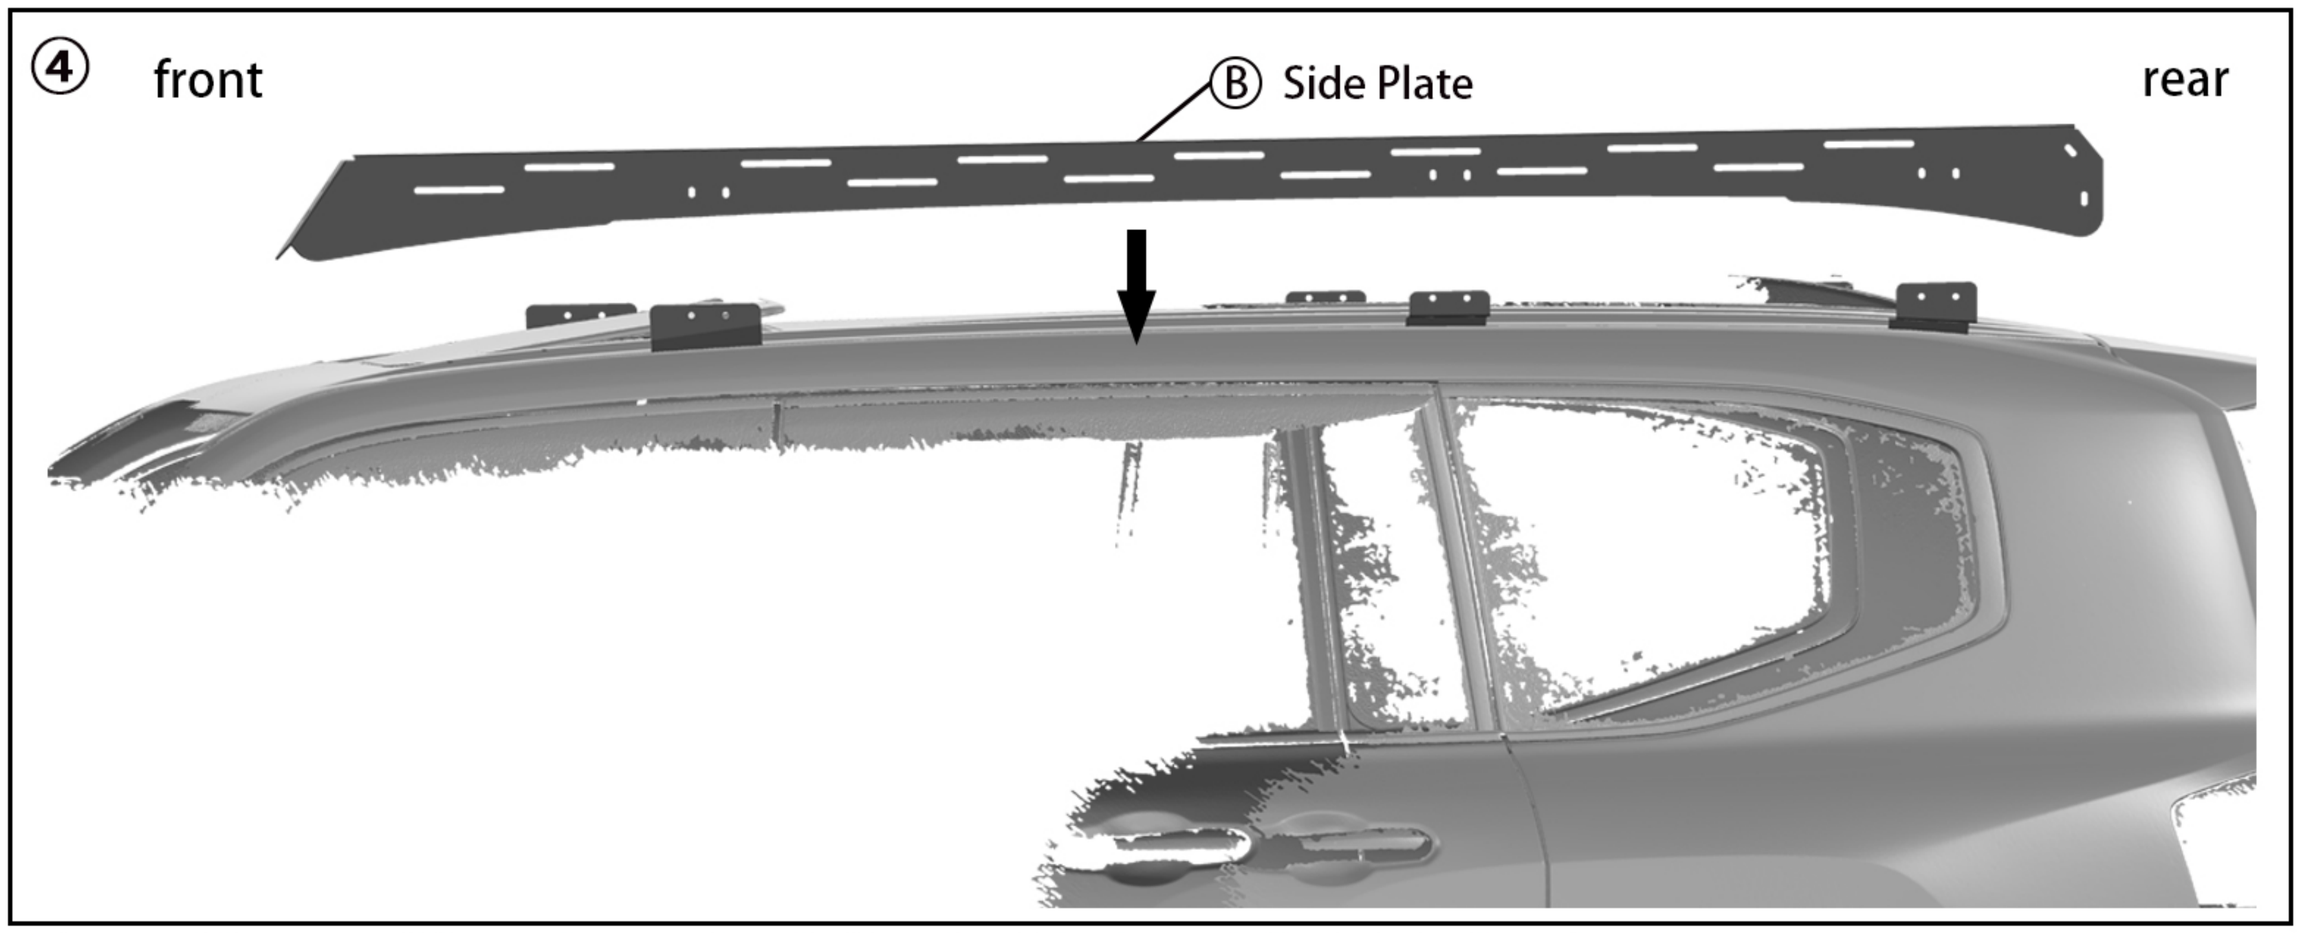

Place side plate (B) on the roof and align it with the original hole bracket.

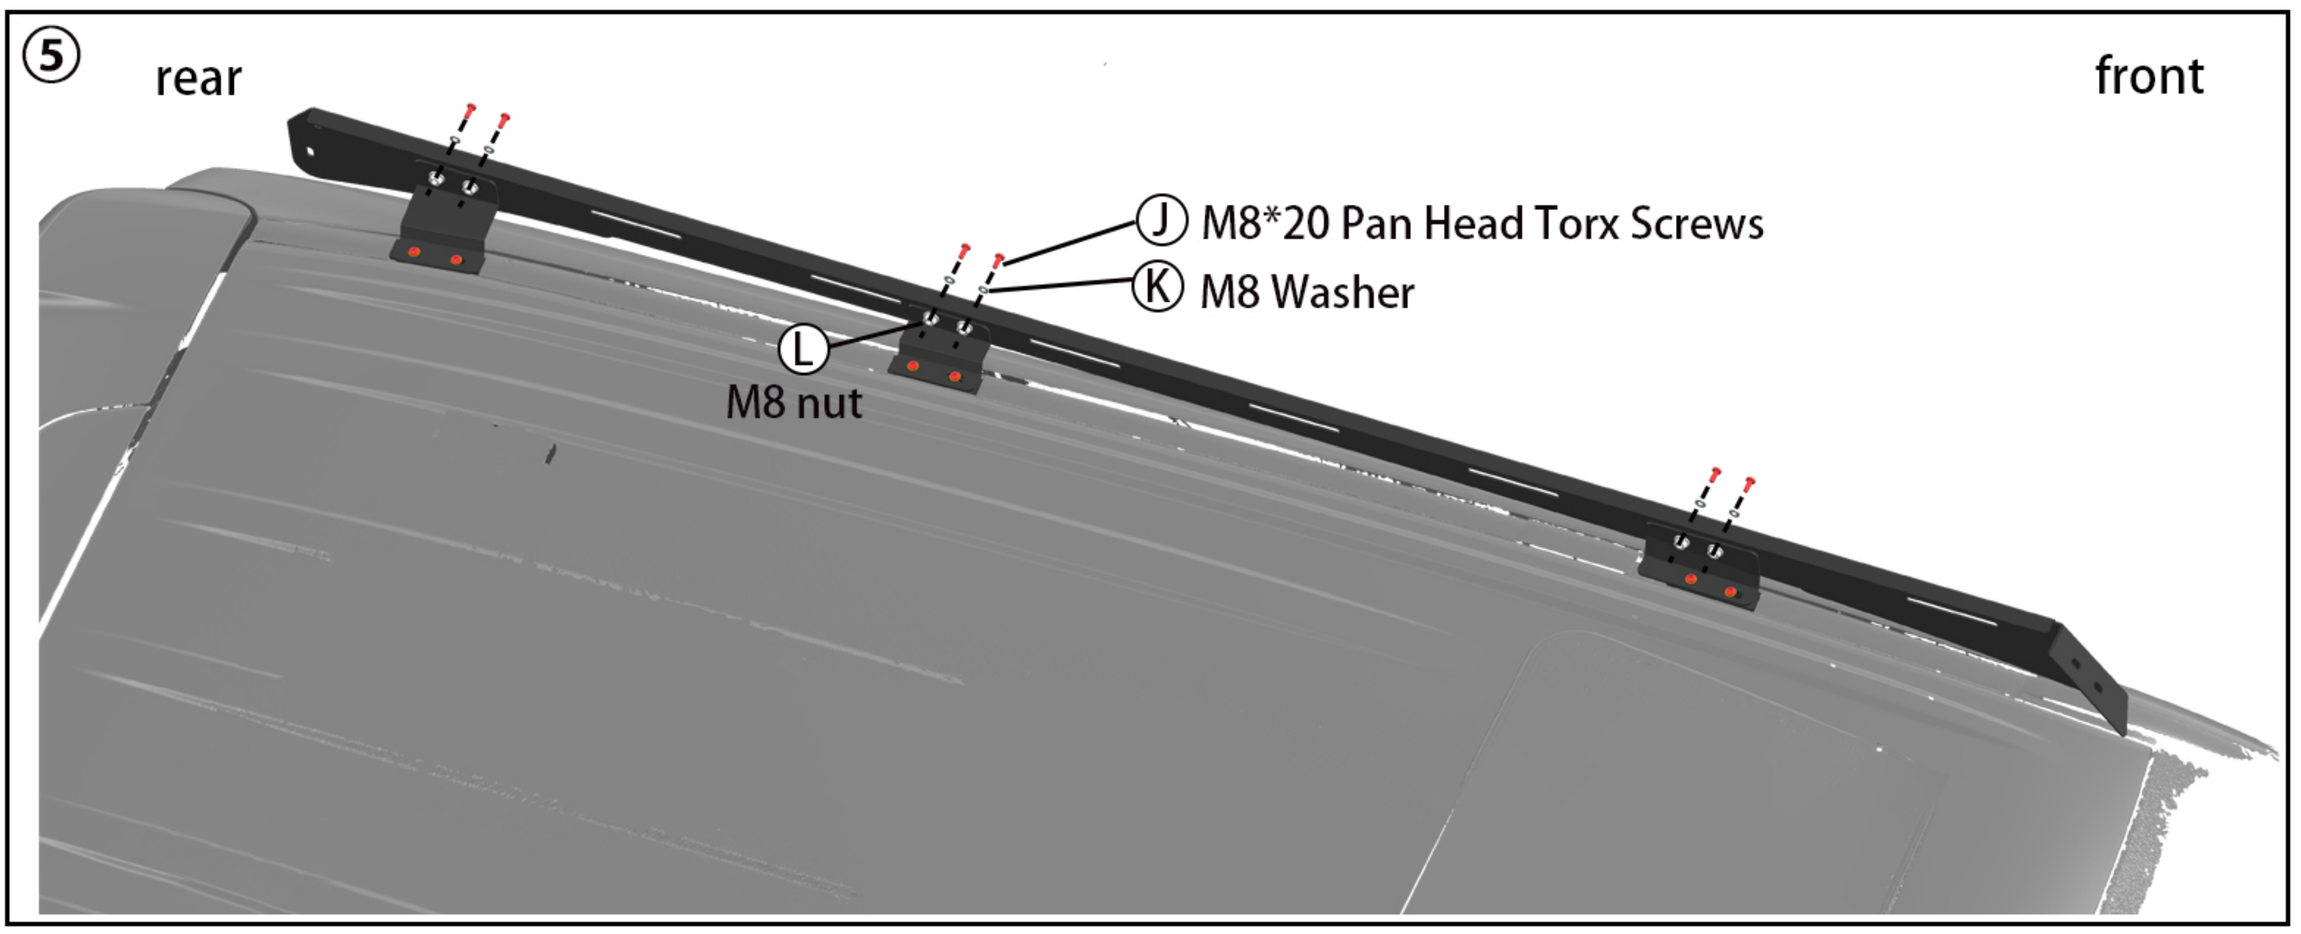

Fix the side plate with M8x20 Torx Screws (J), washers (K), and nuts (L)

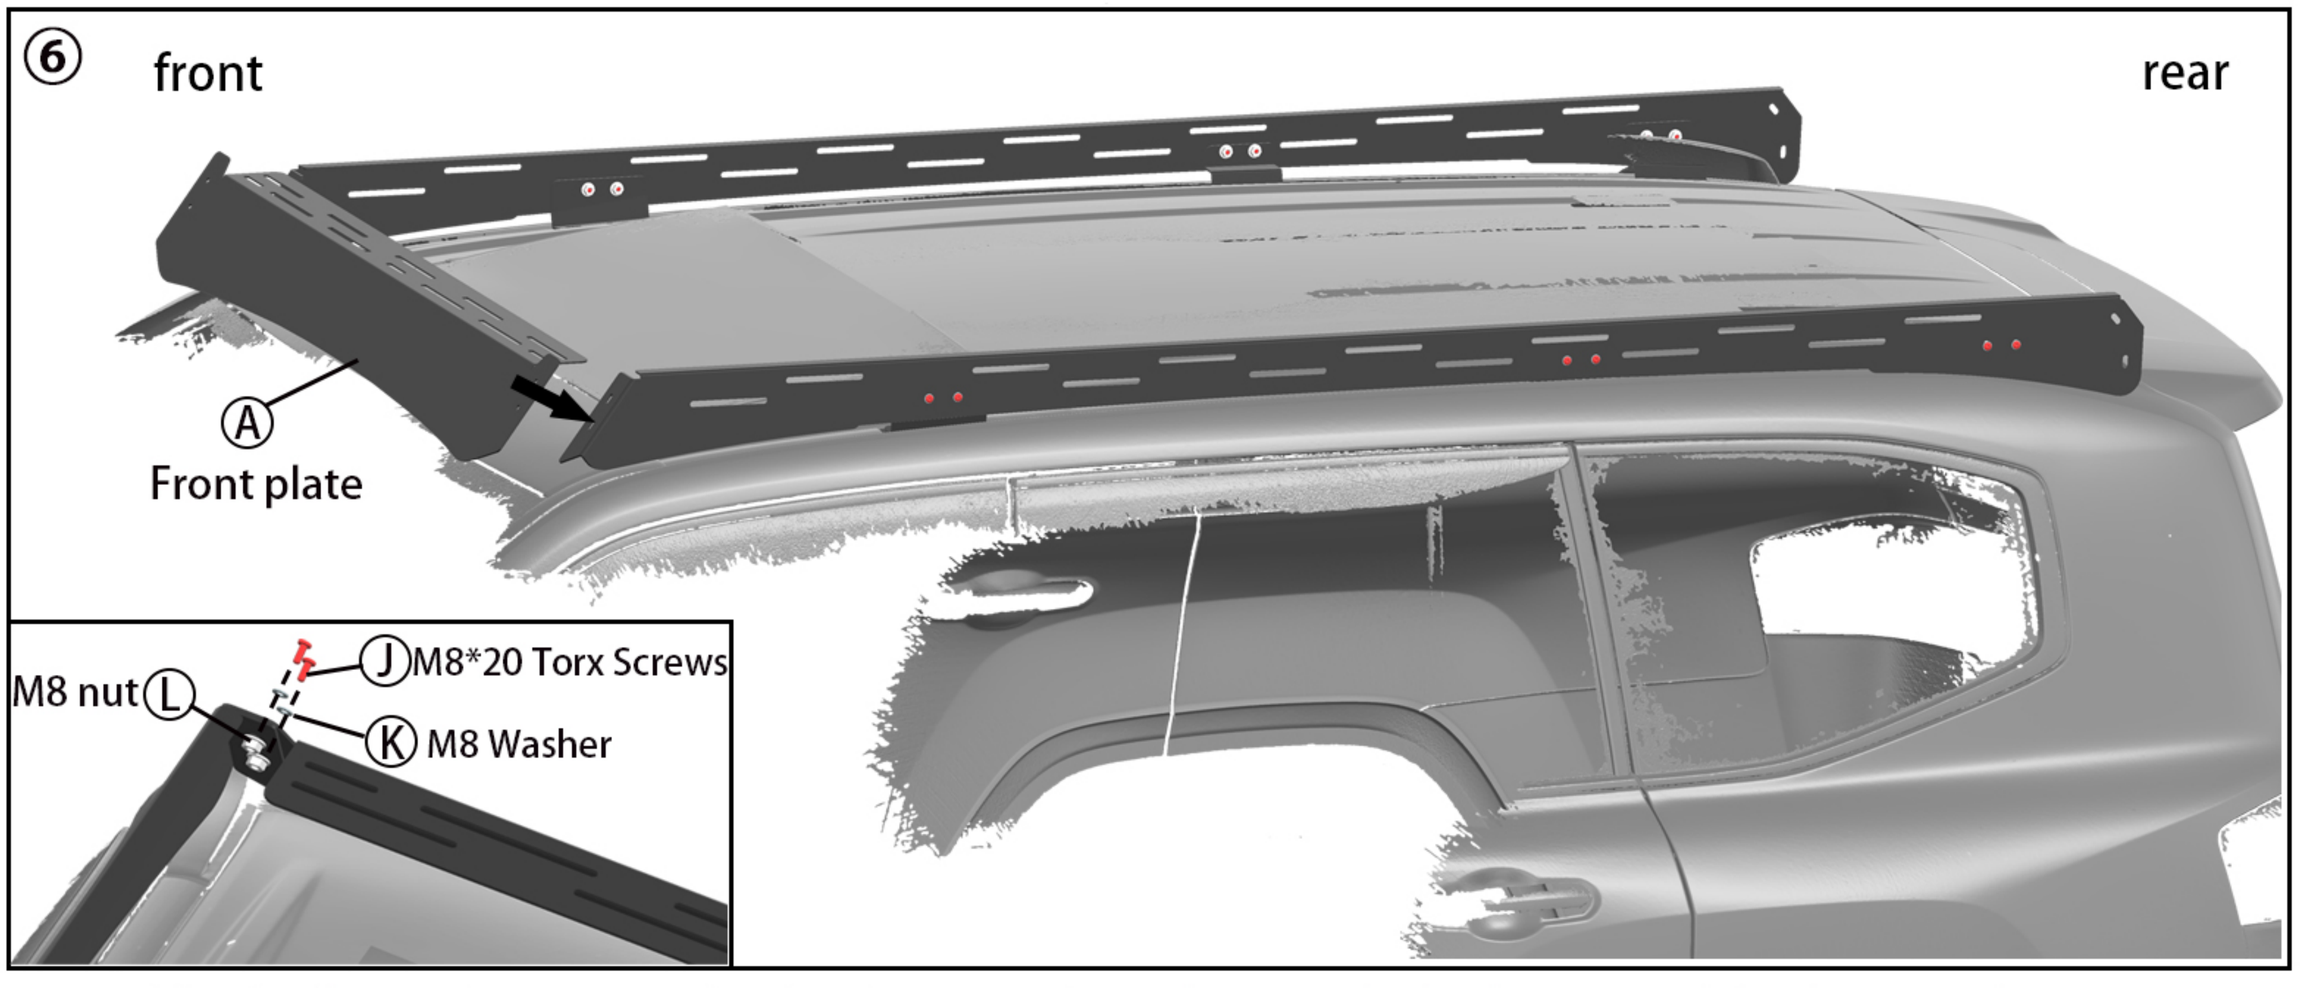

Assemble the front plate (A) and side plate (B), align them with the holes, and fix them with M8x20 torx screws (J), washers (K), and nuts (L).

⑦

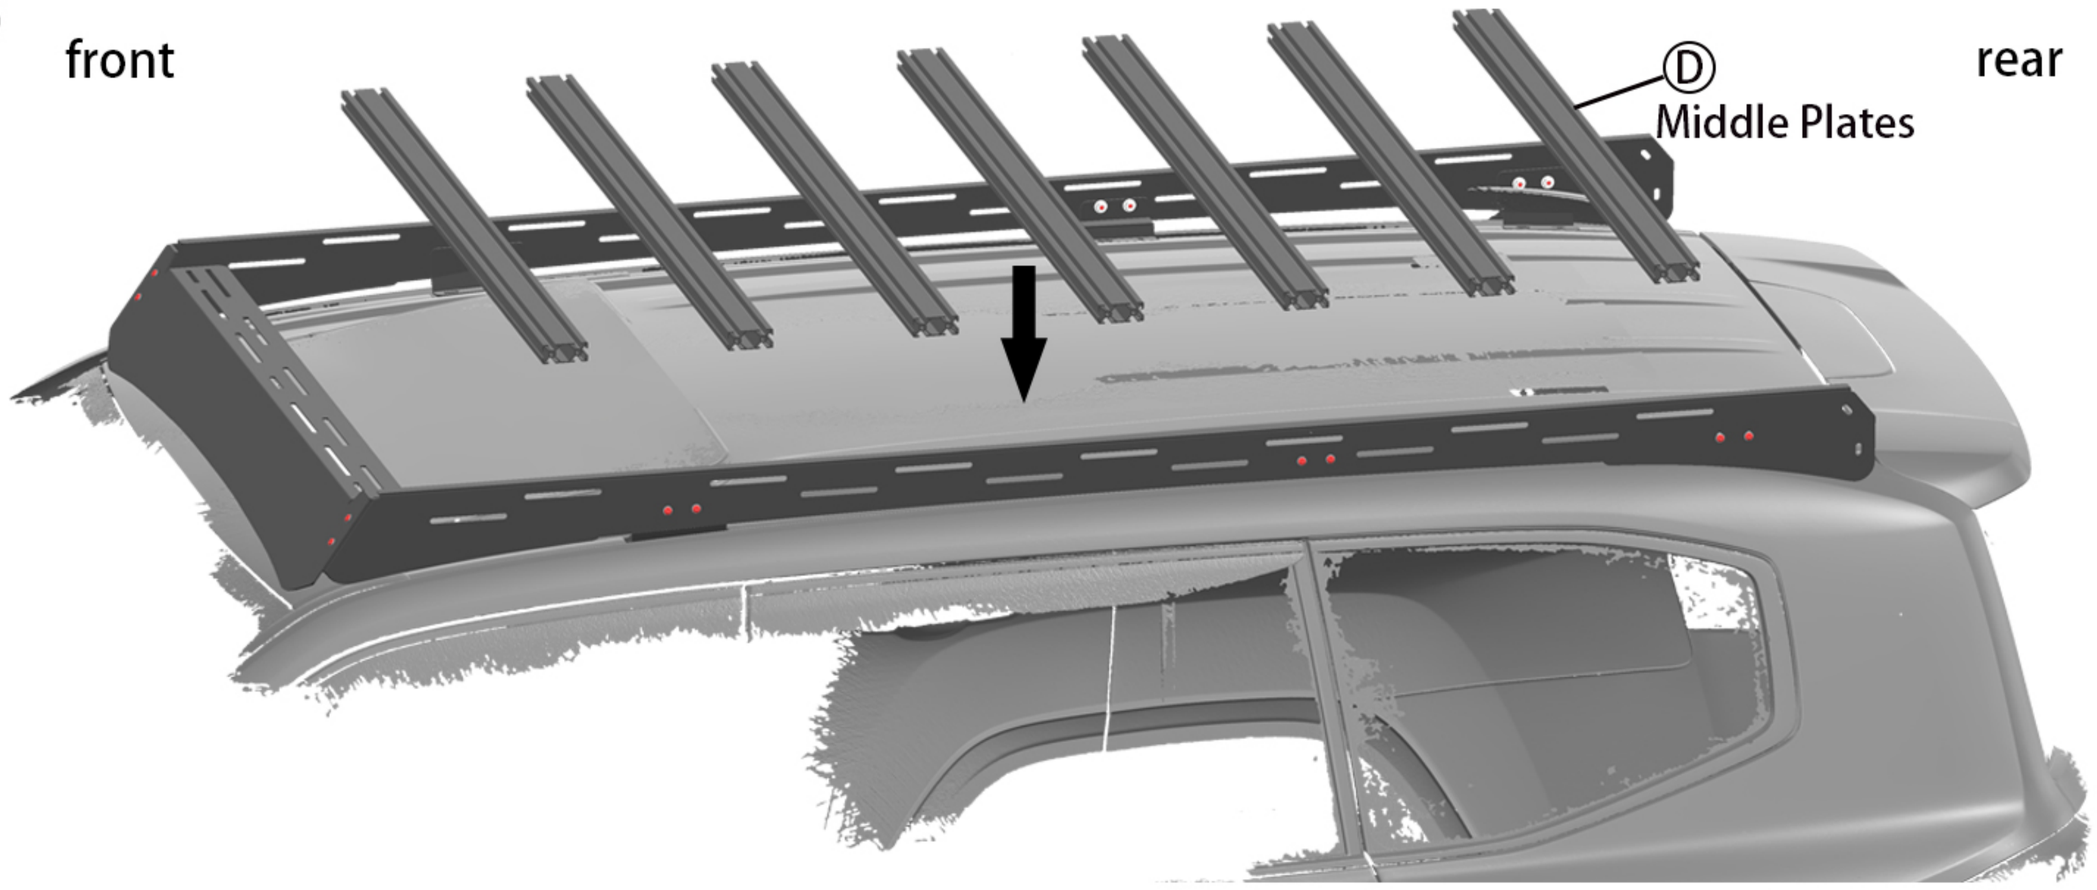

Install the middle plate, align the middle plates (D) with the side plate holes,

⑧

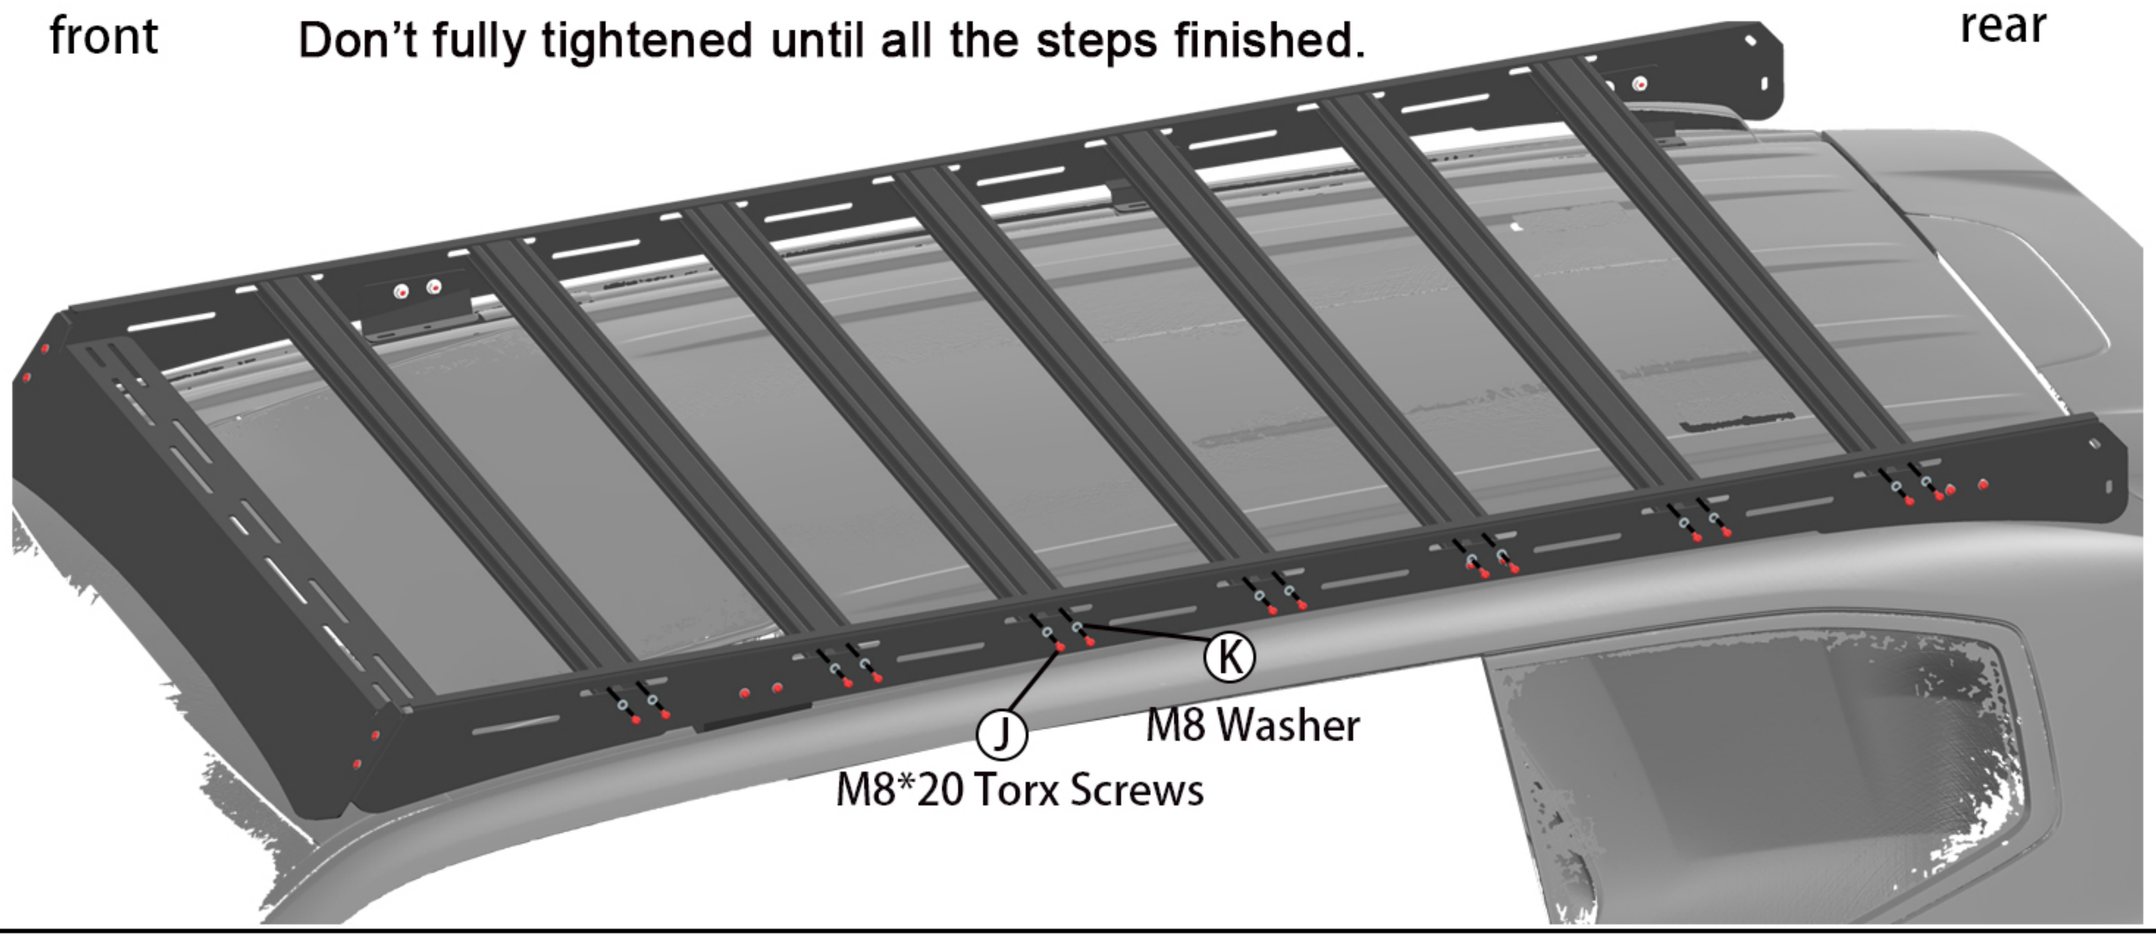

fix the middle plates with M8x20 torx screws (J) and washers (K).

⑨

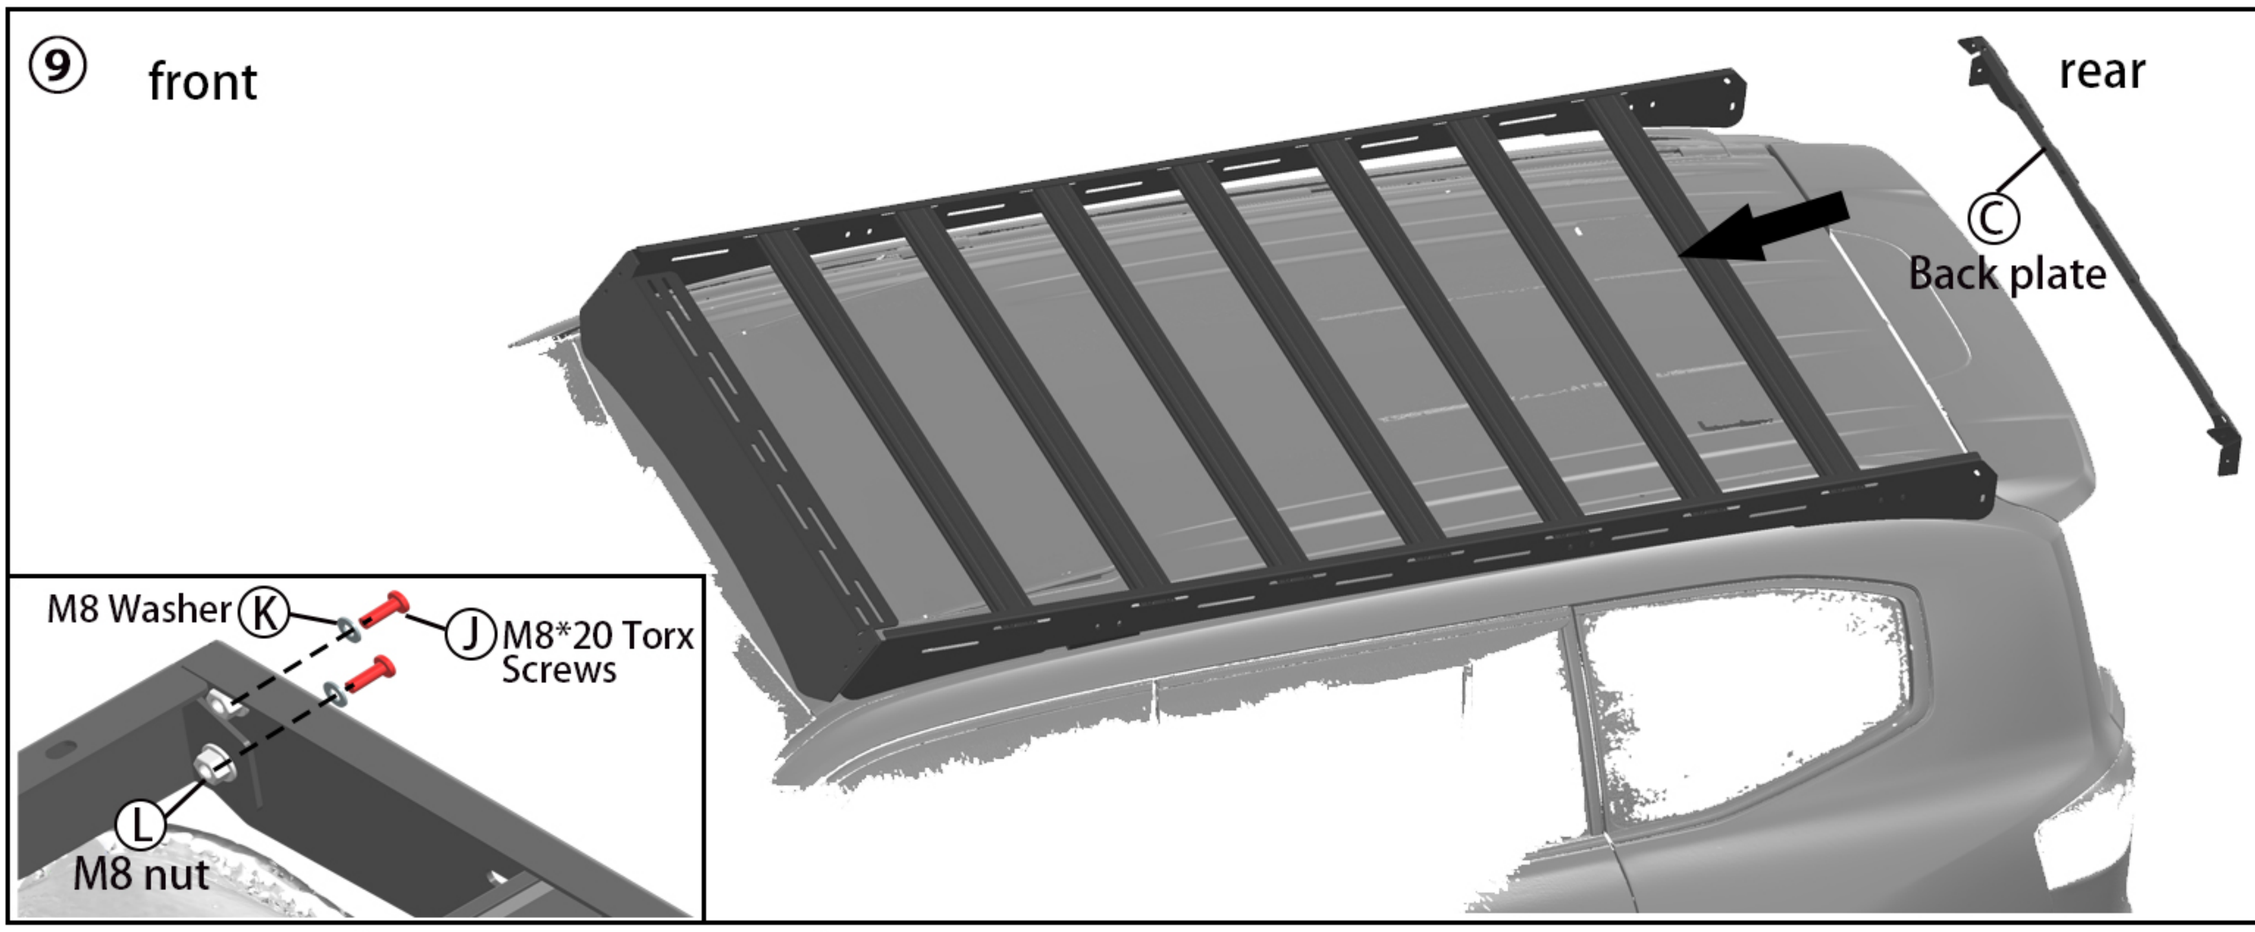

Install the back plate, align the back plate (C) with the side plate holes, and secure it with M8x20 pan head torx screws (J), washers (K), and nuts (L).

⑩ front rear

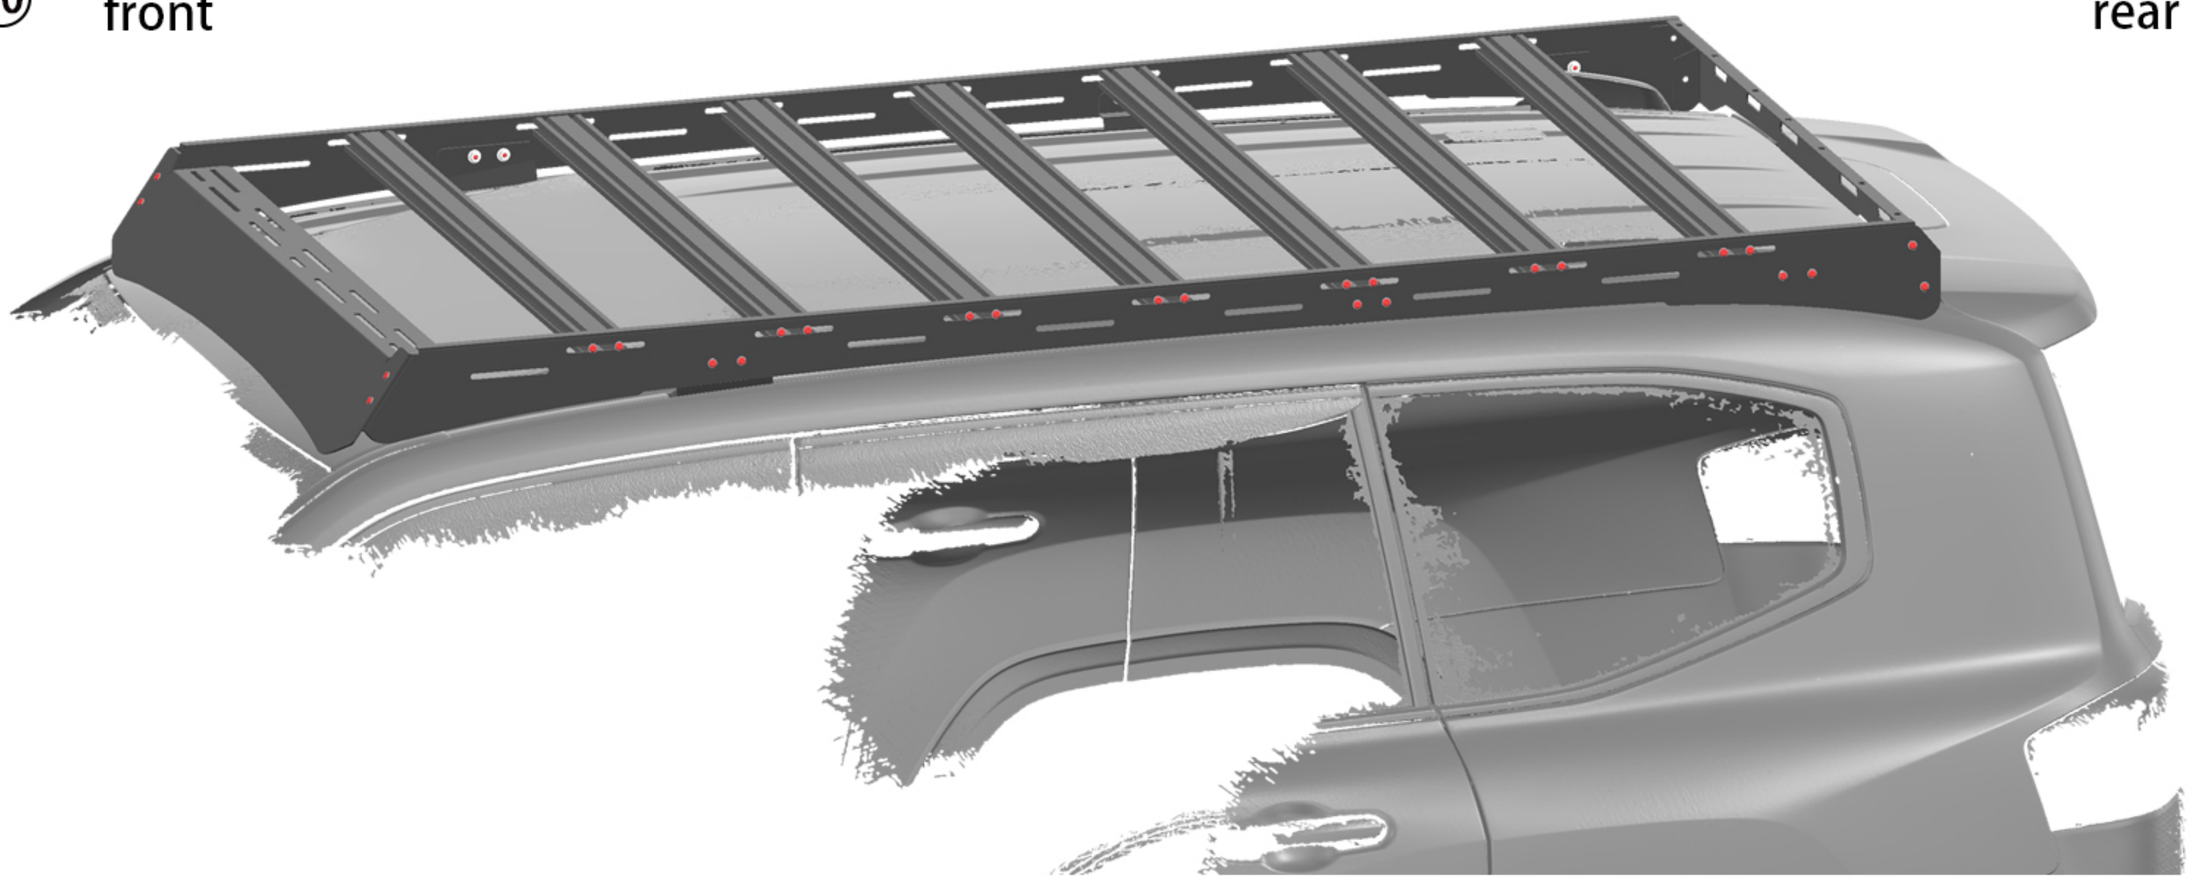

Ensure that all components (Front Plate, Side Panels, Middle Panels, Back Plate) are correctly installed and securely tightened.