INSTALLATION INSTRUCTION
LC250 / LEXUS GX550 HIGH-RISE CROSS BAR



INFORMATION


The information in these installation instructions is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely install equipment in your vehicle. These procedures should not be attempted by individuals without professional expertise or by "do-it-yourselfers."

WARNING ⚠

It is critical that all products are properly and securely assembled and attached to your vehicle. Improper attachment could result in an automobile accident, causing serious bodily injury or death. You are responsible for assembling and securing all components to your vehicle, checking the attachments prior to use, and periodically inspecting the products for adjustment, wear, and damage.
Therefore, you must read and understand all instructions and precautions supplied with your product prior to installation or use. If you do not understand all instructions and cautions, or if you lack mechanical experience and are not thoroughly familiar with the installation procedures, you should have the product installed by a professional installer or other qualified personnel.

NOTE: We will not be responsible for any damage caused by the failure to install the product according to these instructions. If you have any questions about the installation of this product, please contact us for assistance.


PARTS LIST

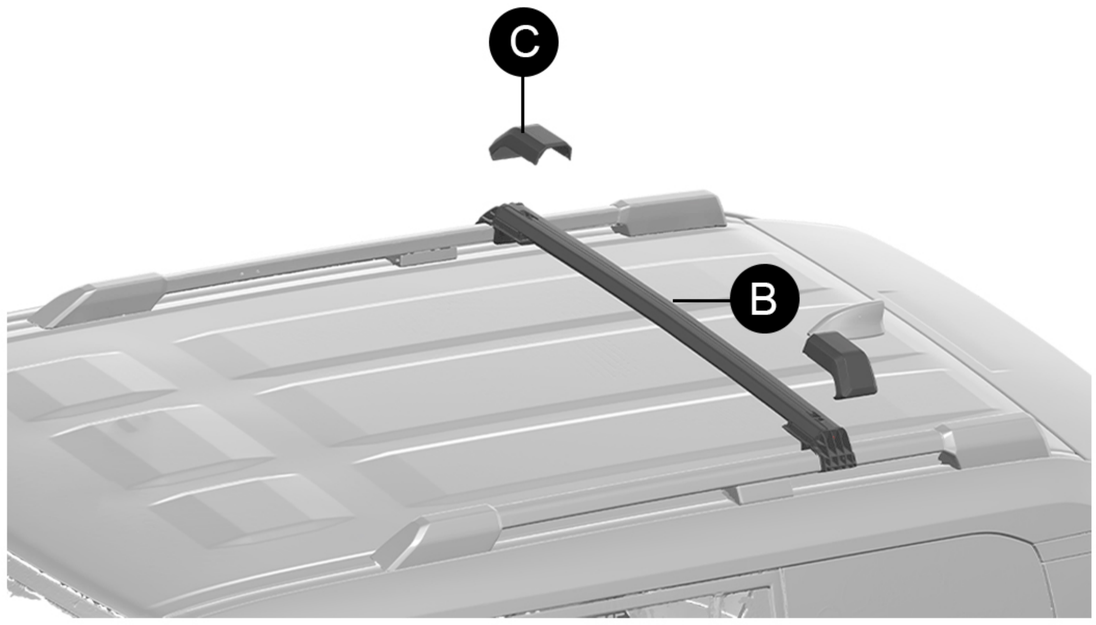

	QTY	NAME
A	x 1	Front Bar
B	x 1	Rear Bar
C	x 4	Plastic Covers (LF, RF, LR, RR)
D	x 1	T30 Wrench


INSTALLATION STEPS

Figure 1

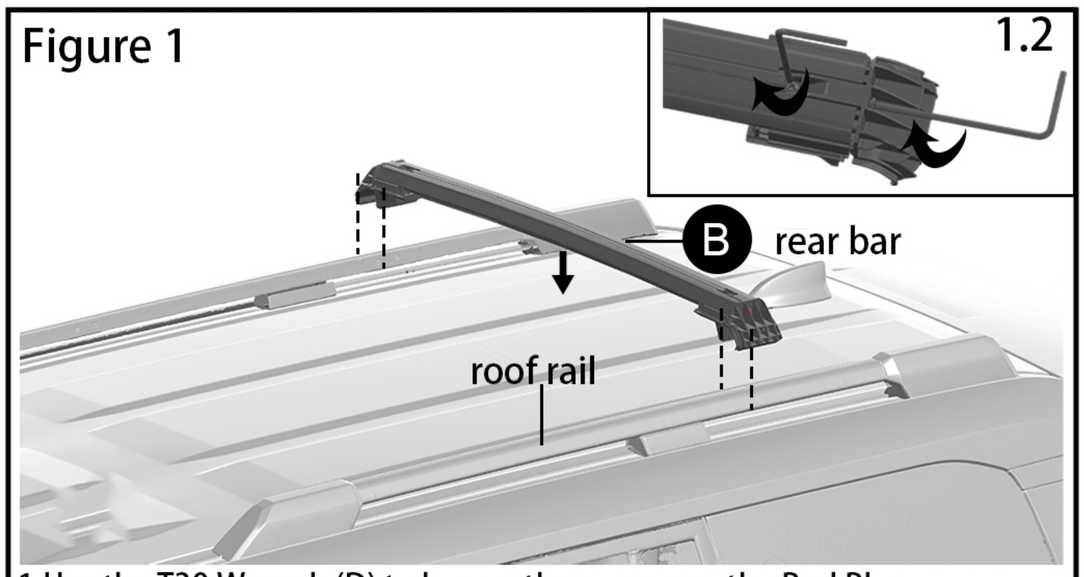


1.Use the T30 Wrench (D) to loosen the screws on the Rod Plug.
2.Place the Rear Bar (B) onto the Roof Rail at the designated position.

Figure 2

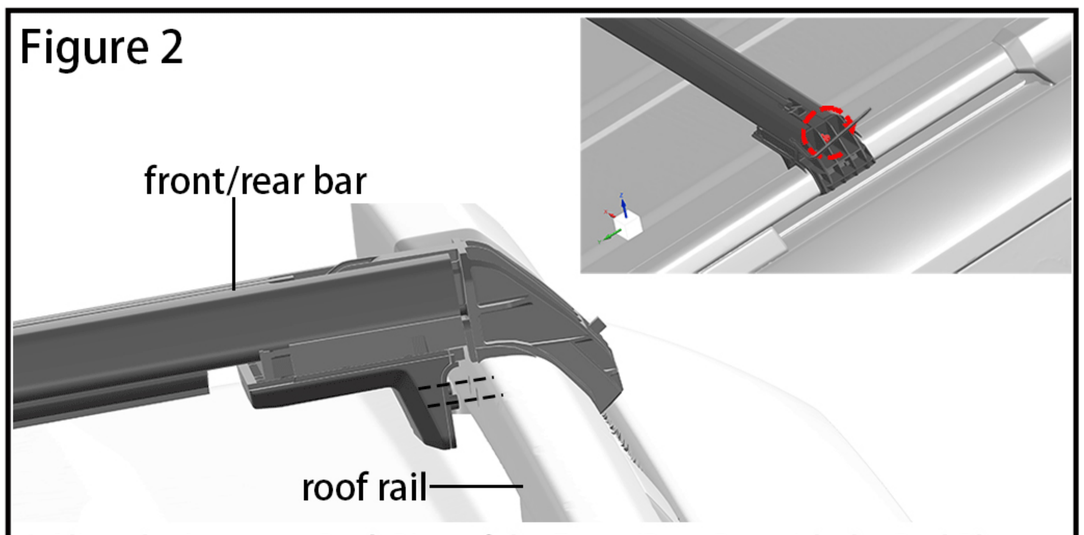


1.Align the Luggage Rack Pipe of the Front/Rear Bar with the Rod Plug.
2.Ensure the leather cushion aligns with the Roof Rail Hole, and securely tighten the screws.

Figure 3

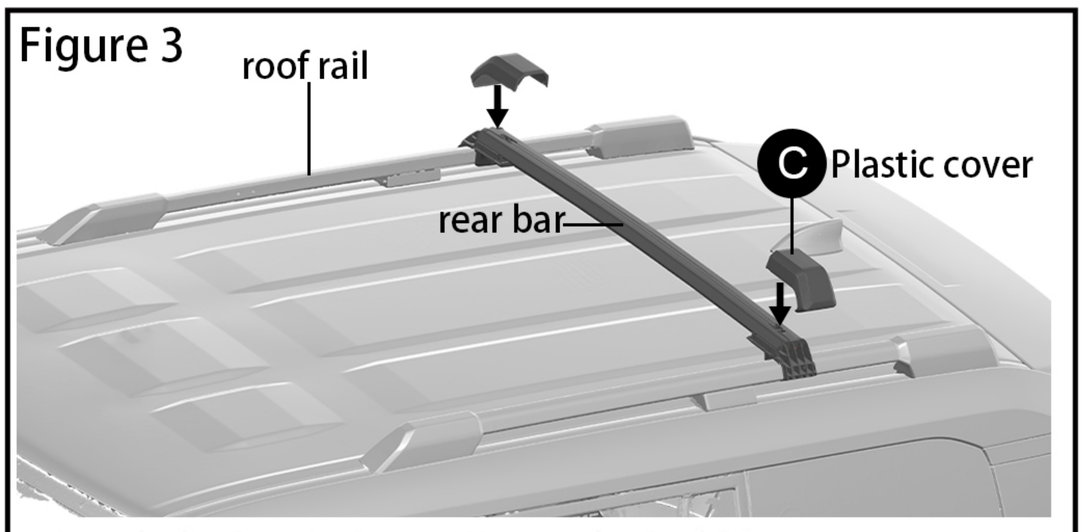


1.Attach the Plastic Cover (C) over the Rod Plug.
2.Fasten it securely to ensure it is properly in place.

Figure 4

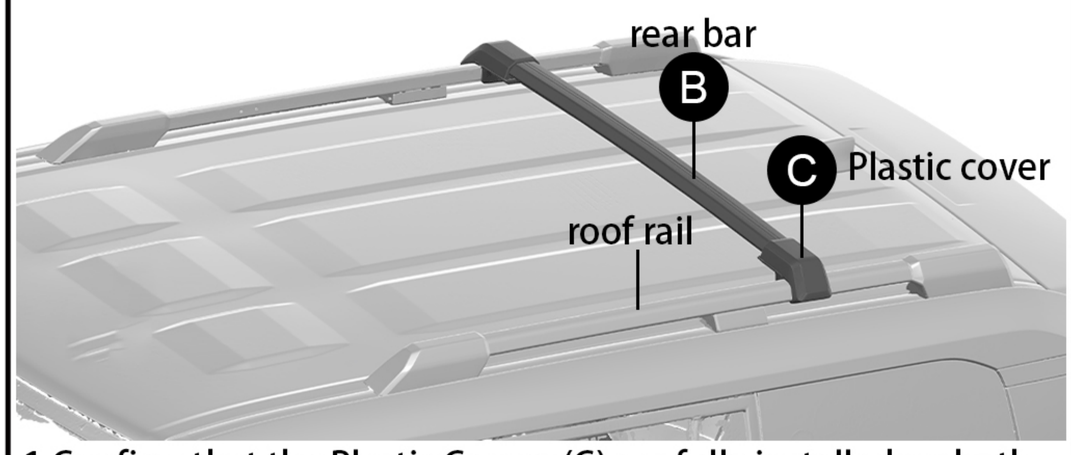

1.Confirm that the Plastic Covers (C) are fully installed on both the Front Bar (A) and Rear Bar (B).

Figure 5

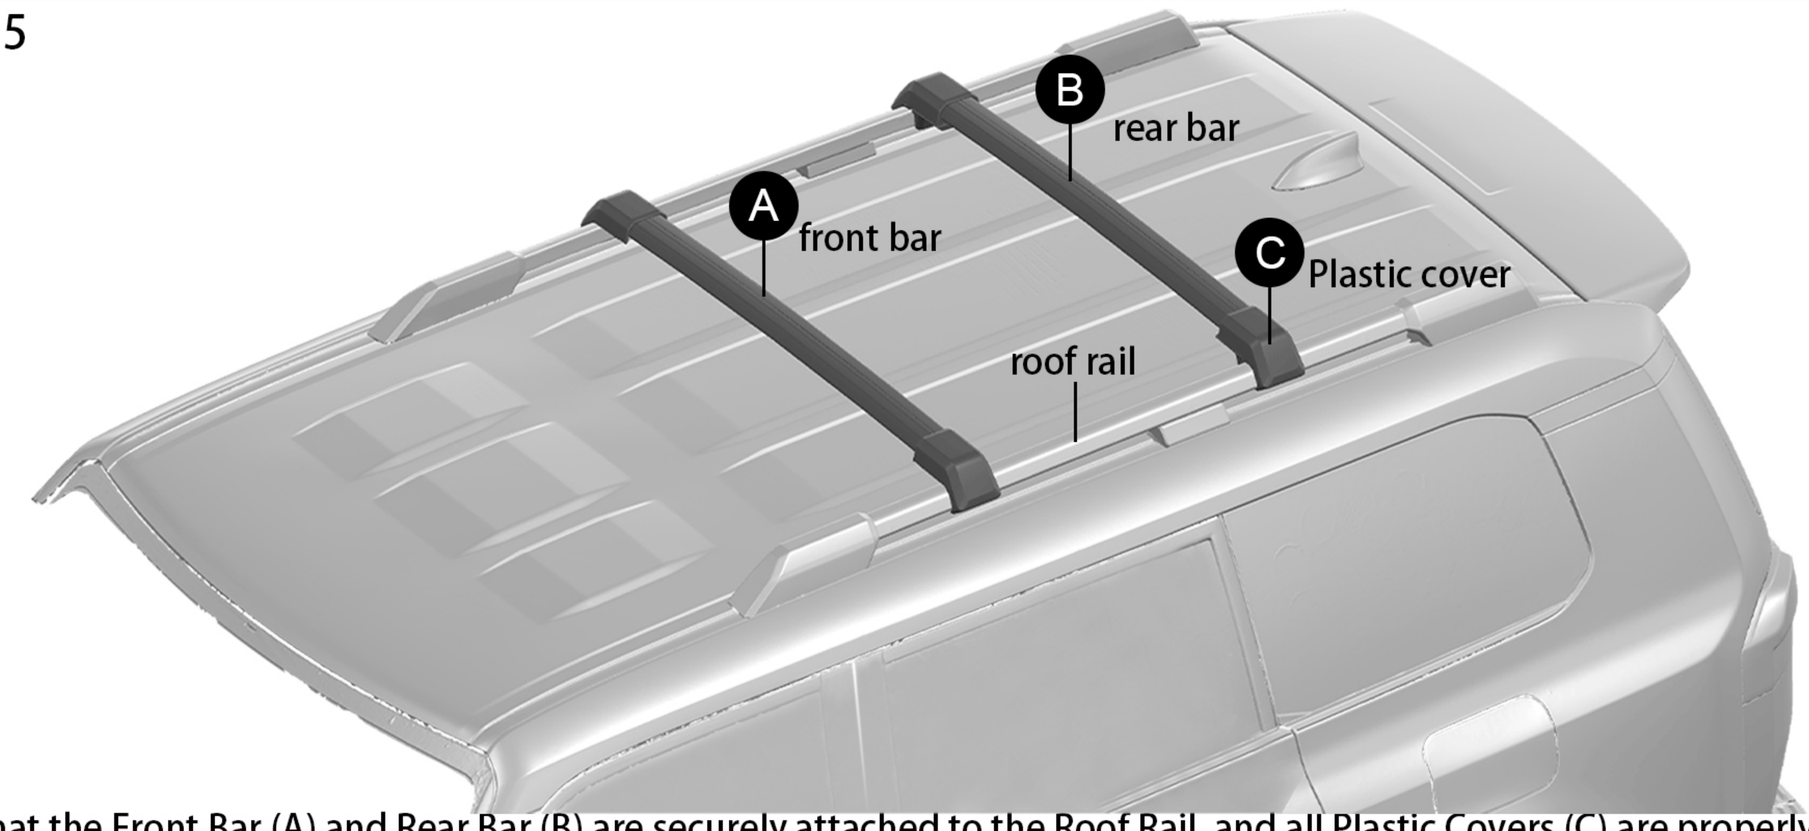

Verify that the Front Bar (A) and Rear Bar (B) are securely attached to the Roof Rail, and all Plastic Covers (C) are properly installed.
The installation is complete.

Notes:

- Ensure all screws are securely tightened to avoid movement during use.
- Double-check alignment and position before final tightening.