
INSTALLATION INSTRUCTION
STORAGE BOX FITS FOR LC250 / LEXUS GX550

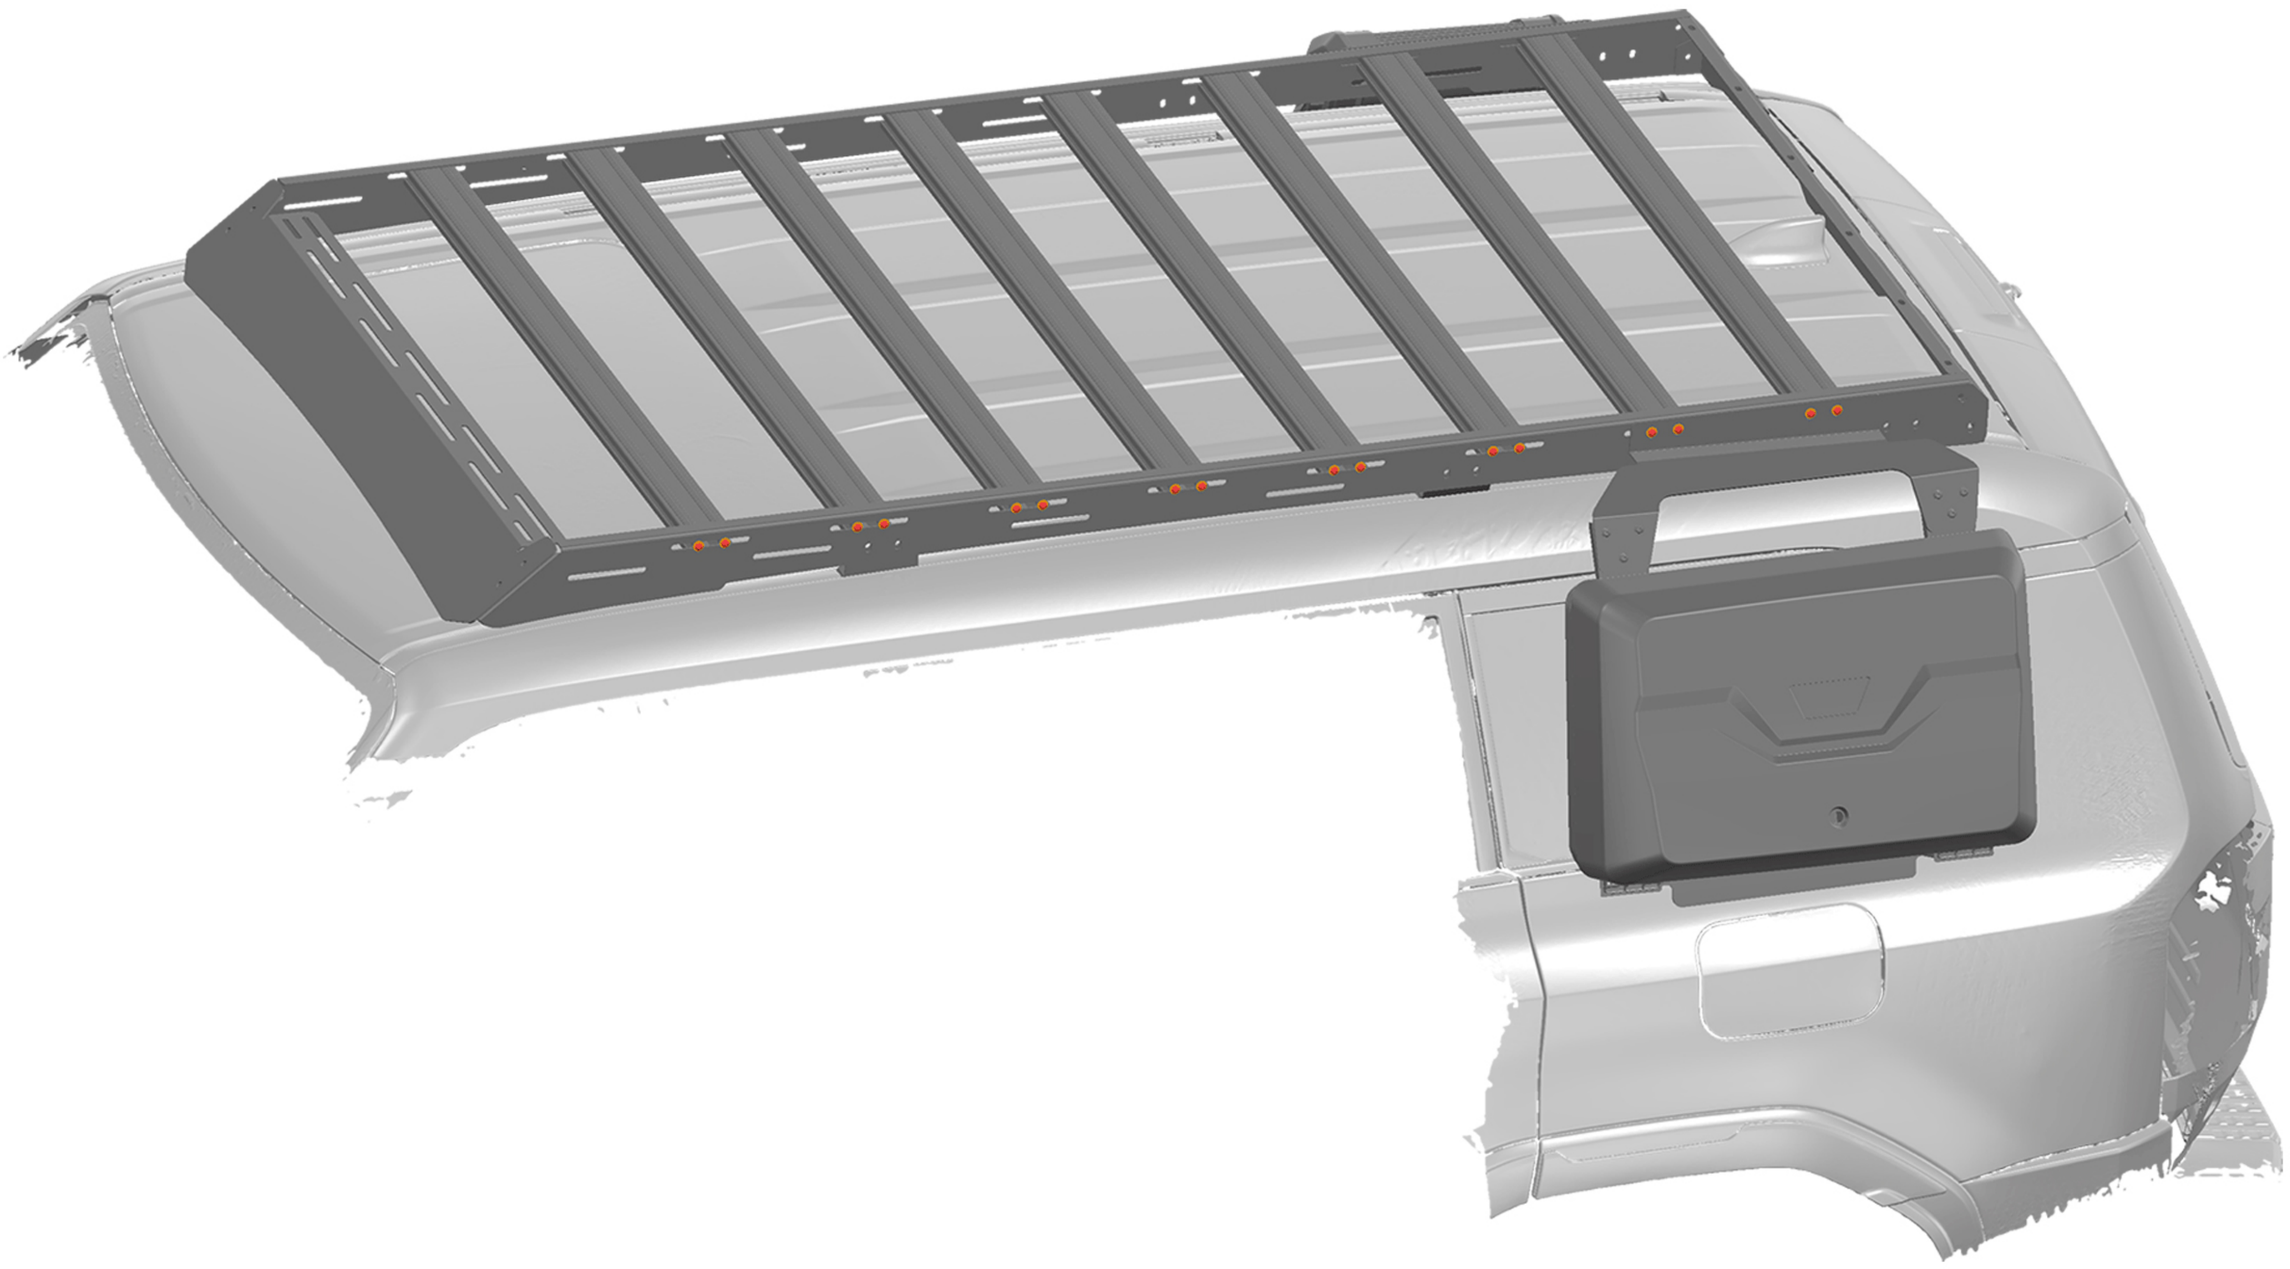

INFORMATION


The information in these installation instructions is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely install equipment in your vehicle. These procedures should not be attempted by individuals without professional expertise or by "do-it-yourselfers."

WARNING ⚠

It is critical that all products are properly and securely assembled and attached to your vehicle. Improper attachment could result in an automobile accident, causing serious bodily injury or death. You are responsible for assembling and securing all components to your vehicle, checking the attachments prior to use, and periodically inspecting the products for adjustment, wear, and damage.
Therefore, you must read and understand all instructions and precautions supplied with your product prior to installation or use. If you do not understand all instructions and cautions, or if you lack mechanical experience and are not thoroughly familiar with the installation procedures, you should have the product installed by a professional installer or other qualified personnel.

NOTE: We will not be responsible for any damage caused by the failure to install the product according to these instructions. If you have any questions about the installation of this product, please contact us for assistance.


1 PARTS LIST

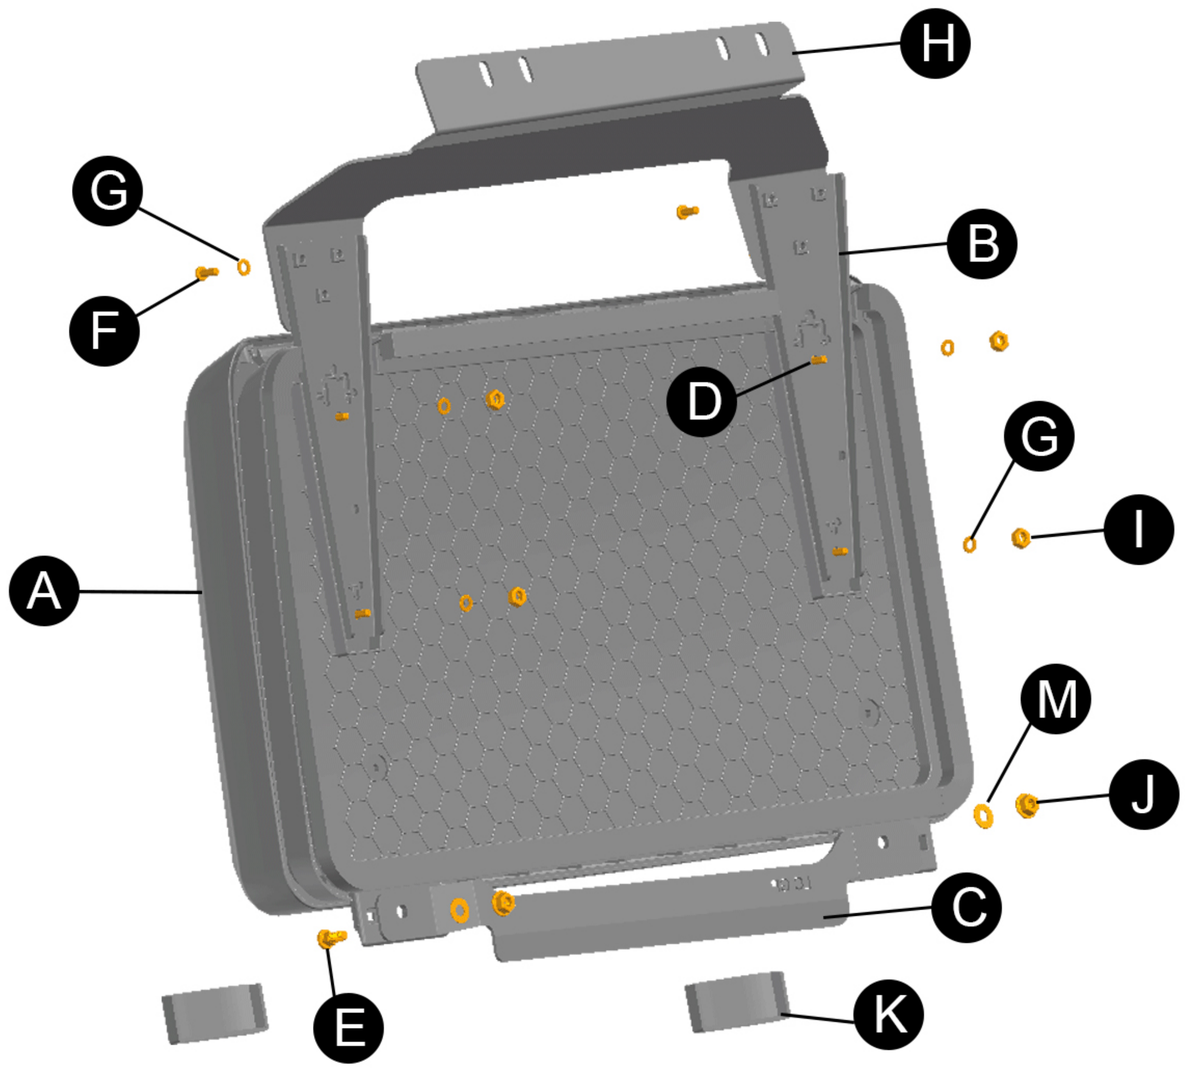

	QTY	NAME
A	x 1	Storage Box (Bag)
B	x 2	Mounting Bracket (L&R)
C	x 1	Lower Bracket
D	x 4	M6*20 Torx Screws
E	x 2	M8*20 Carriage Screws
F	x 6	M6*14 Torx Screws
G	x 10	M6 Gasket
H	x 1	Upper Bracket
I	x 4	M6 Lock Nut
J	x 2	M8 Flange Nut
K	x 2	Lid
L	x 1	T45 Wrench
M	x 2	M8 Gasket


2 INSTALLATION STEPS

Figure 2.1

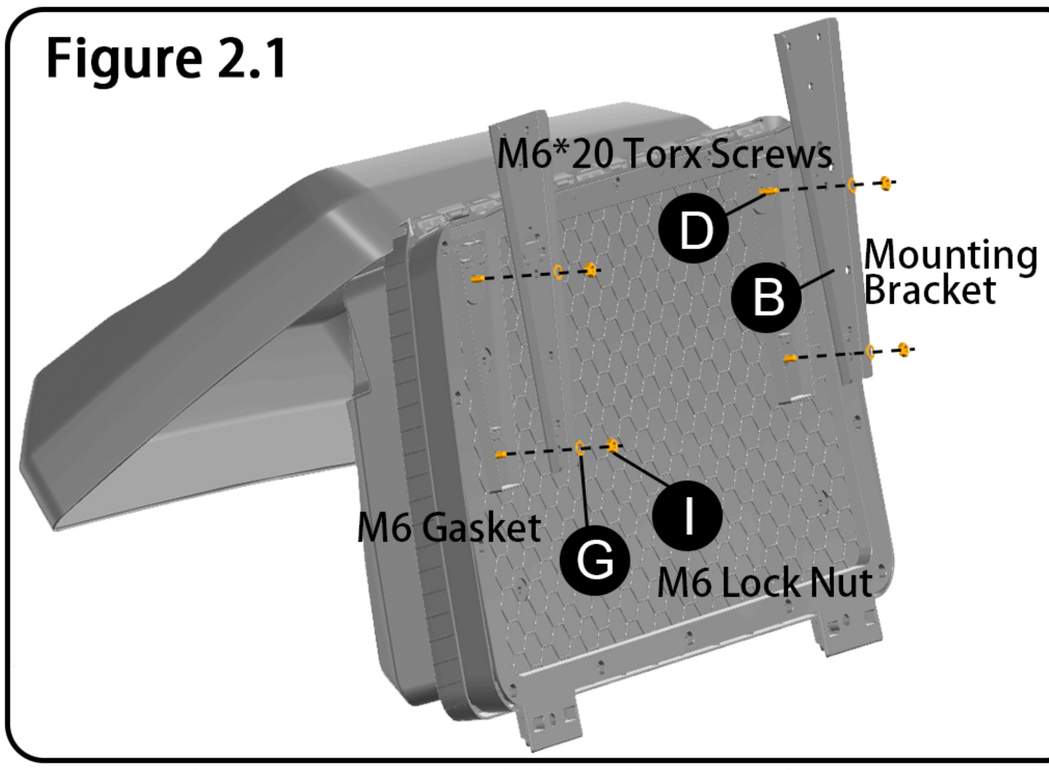


1.Open the Storage Box (A) and insert the screws (D) through the holes on the inside of the box.
2.Align the Mounting Brackets (B) with the holes and attach them using M6 Gaskets (G) and M6 Lock Nuts (I). Tighten securely.

Figure 2.2

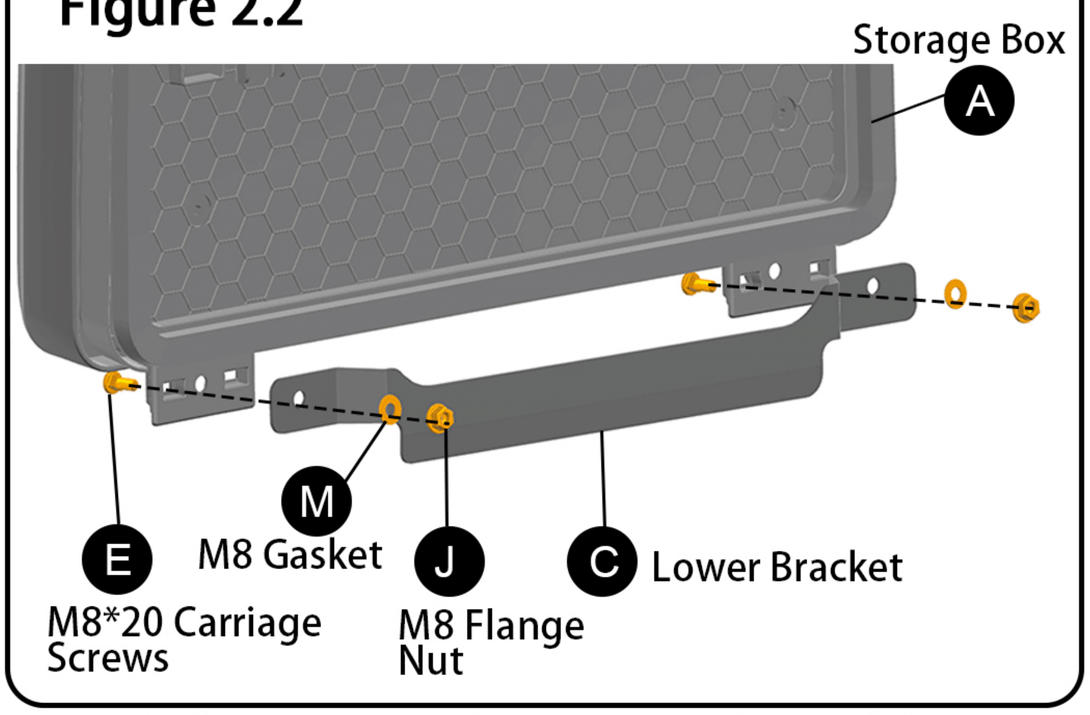


1.Attach the Lower Bracket (C) to the base of the Storage Box (A).
2.Secure it using M8 Carriage Screws (E), M8 Gaskets (M), and M8 Flange Nut (J). Ensure the bracket is tightly fixed to the box.

Figure 2.3

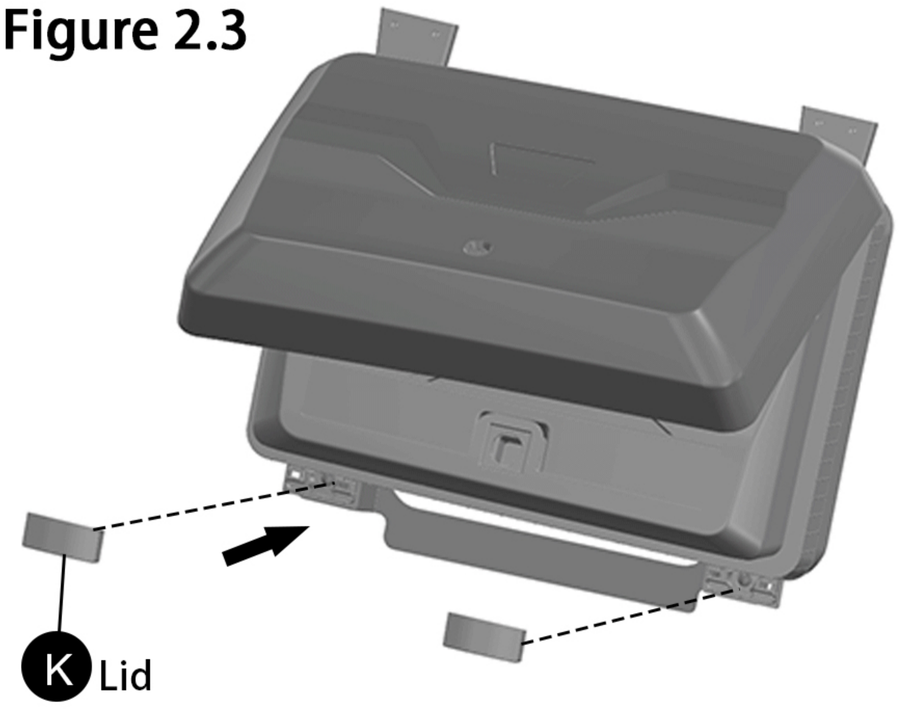


1.Place the Lid (K) onto the Storage Box (A) as shown.
2.Ensure the lid is properly closed and securely attached.

Figure 2.4

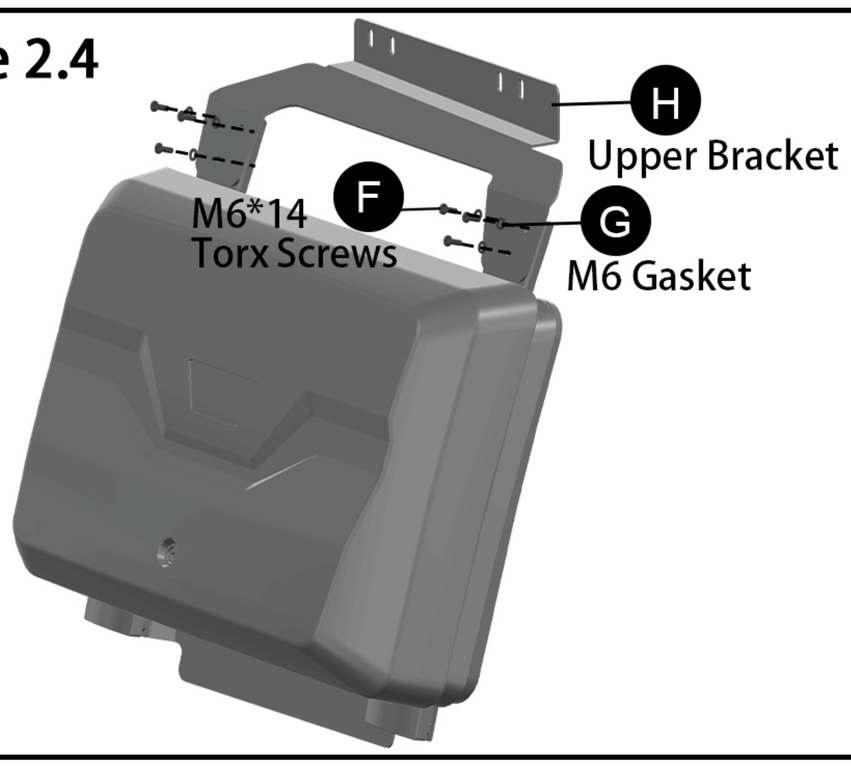


1.Attach the Upper Bracket (H) to the Storage Box (A) using M6*14 Torx Screws (F) and M6 Gaskets (G).
2.Ensure all connections are tight and aligned.

Figure 2.5

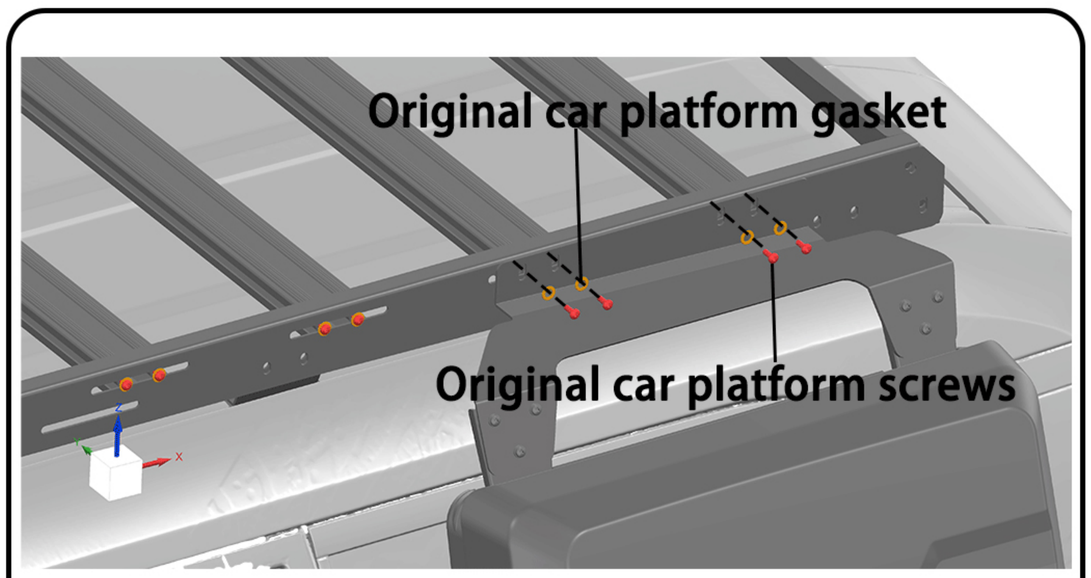


1.Remove the screws fixing the Middle Plate of the Platform on the car roof as shown.
2.Align the Storage Box (A) with the exposed holes and attach it using M8*20 Torx Screws (E) and M8 Gaskets (M). Tighten securely.

Figure 2.6

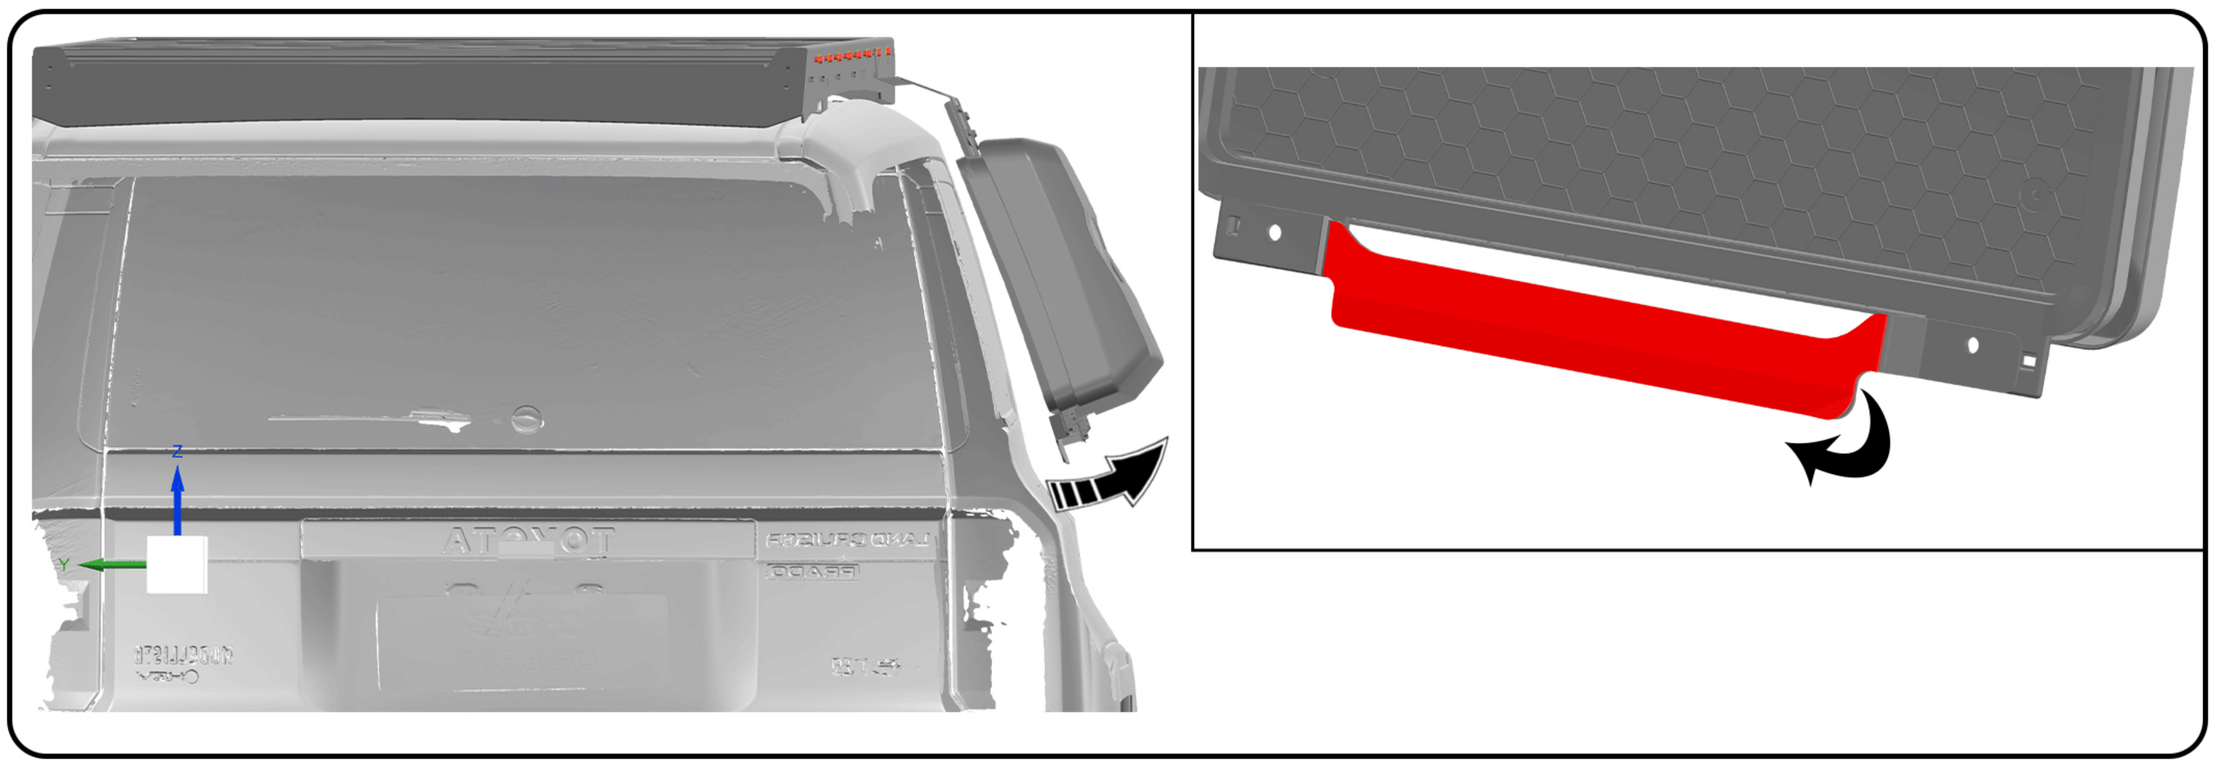

1.Hold the bottom of the Storage Box (A) and gently pull it outward by a short distance.
2.Remove the adhesive backing on the bracket, then carefully press the box against the car body.
3.Ensure the Lower Bracket (C) does not obstruct the fuel tank cap or other functional components.

Figure 2.7

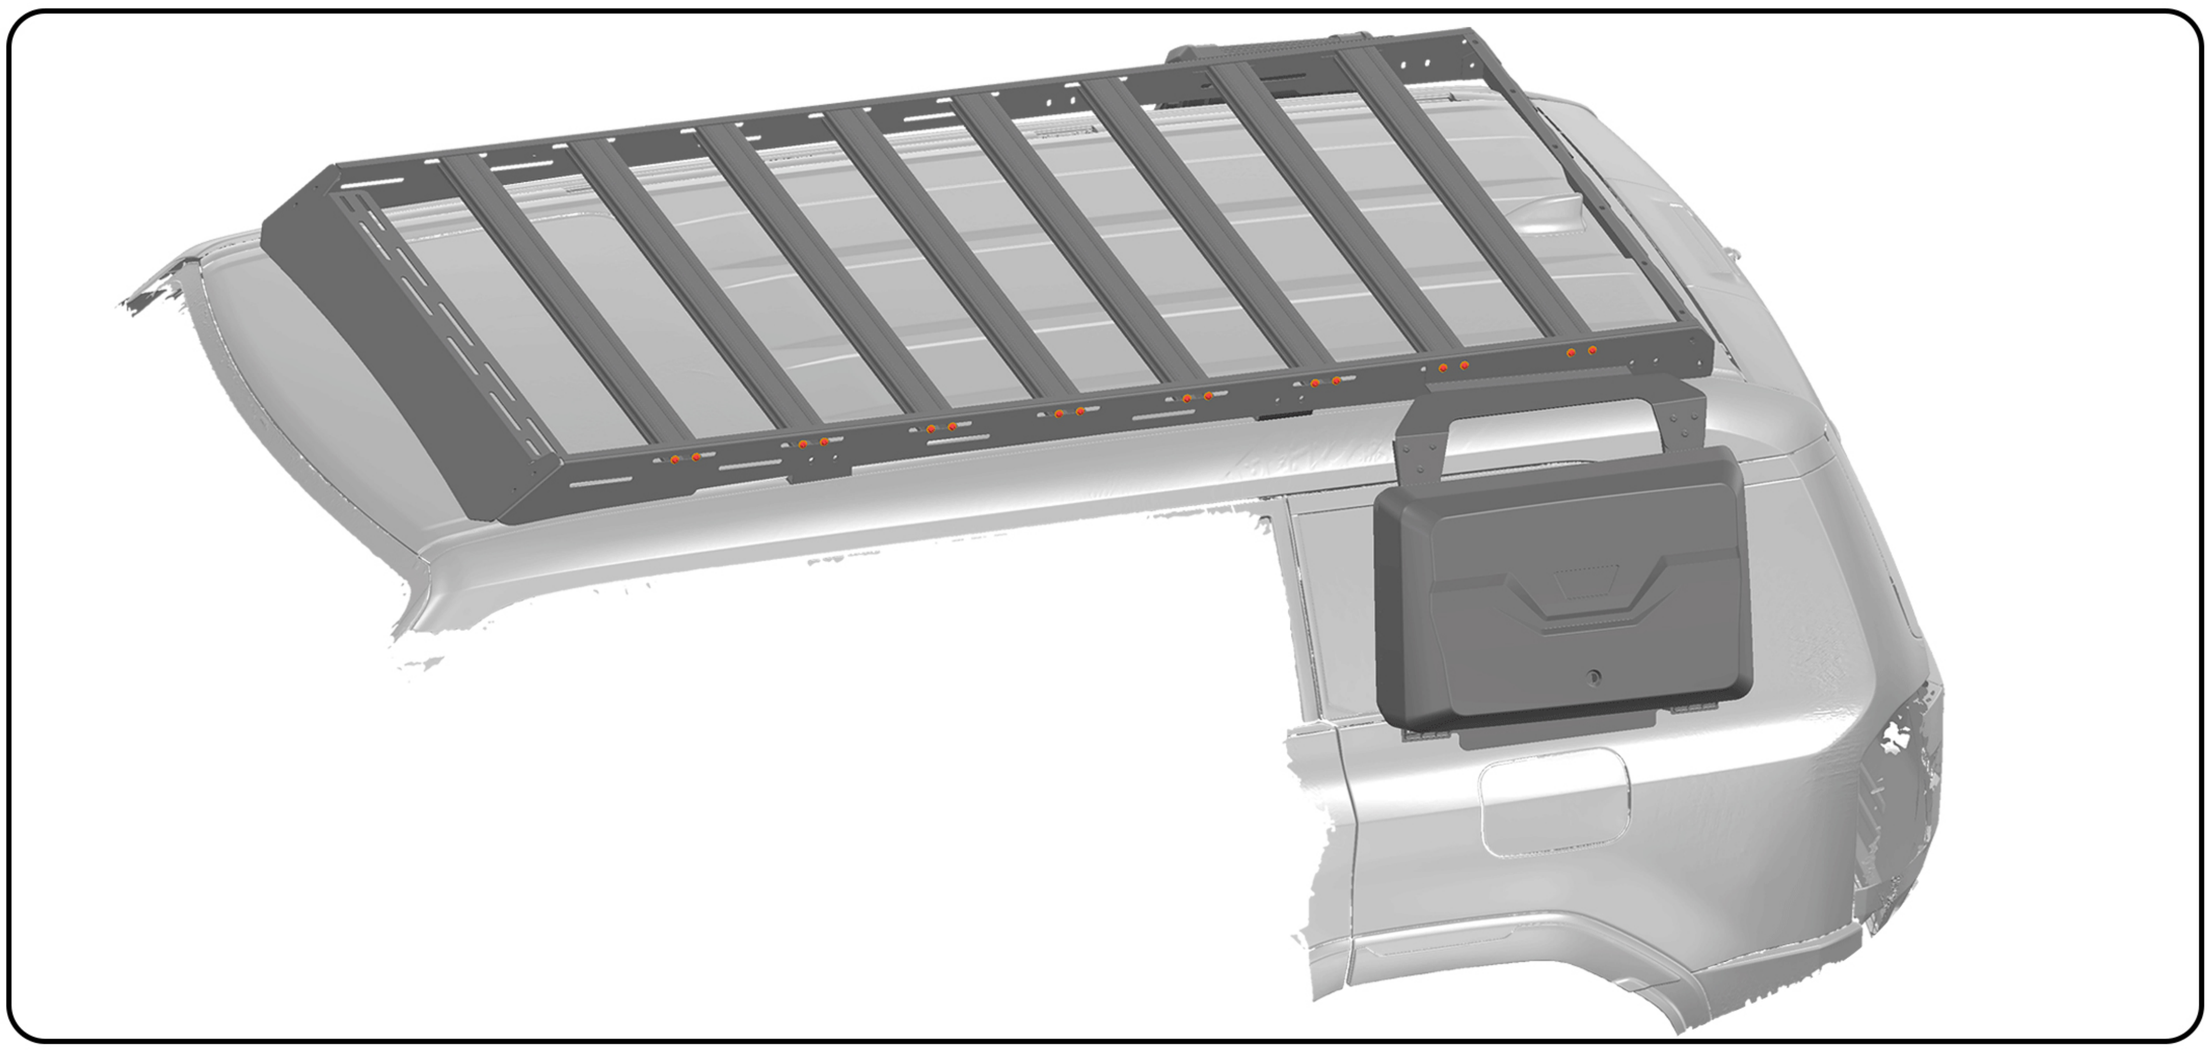

Confirm that the Storage Box (A) is securely mounted to the platform and car body.
The installation is complete.

Notes:

1.Ensure all screws and gaskets are securely tightened during installation.
2.Regularly check the storage box and brackets for stability during use.
3.Avoid over-tightening screws to prevent damage to components.