
INSTALLATION INSTRUCTION
STORAGE BOX FITS FOR LC250 / LEXUS GX550

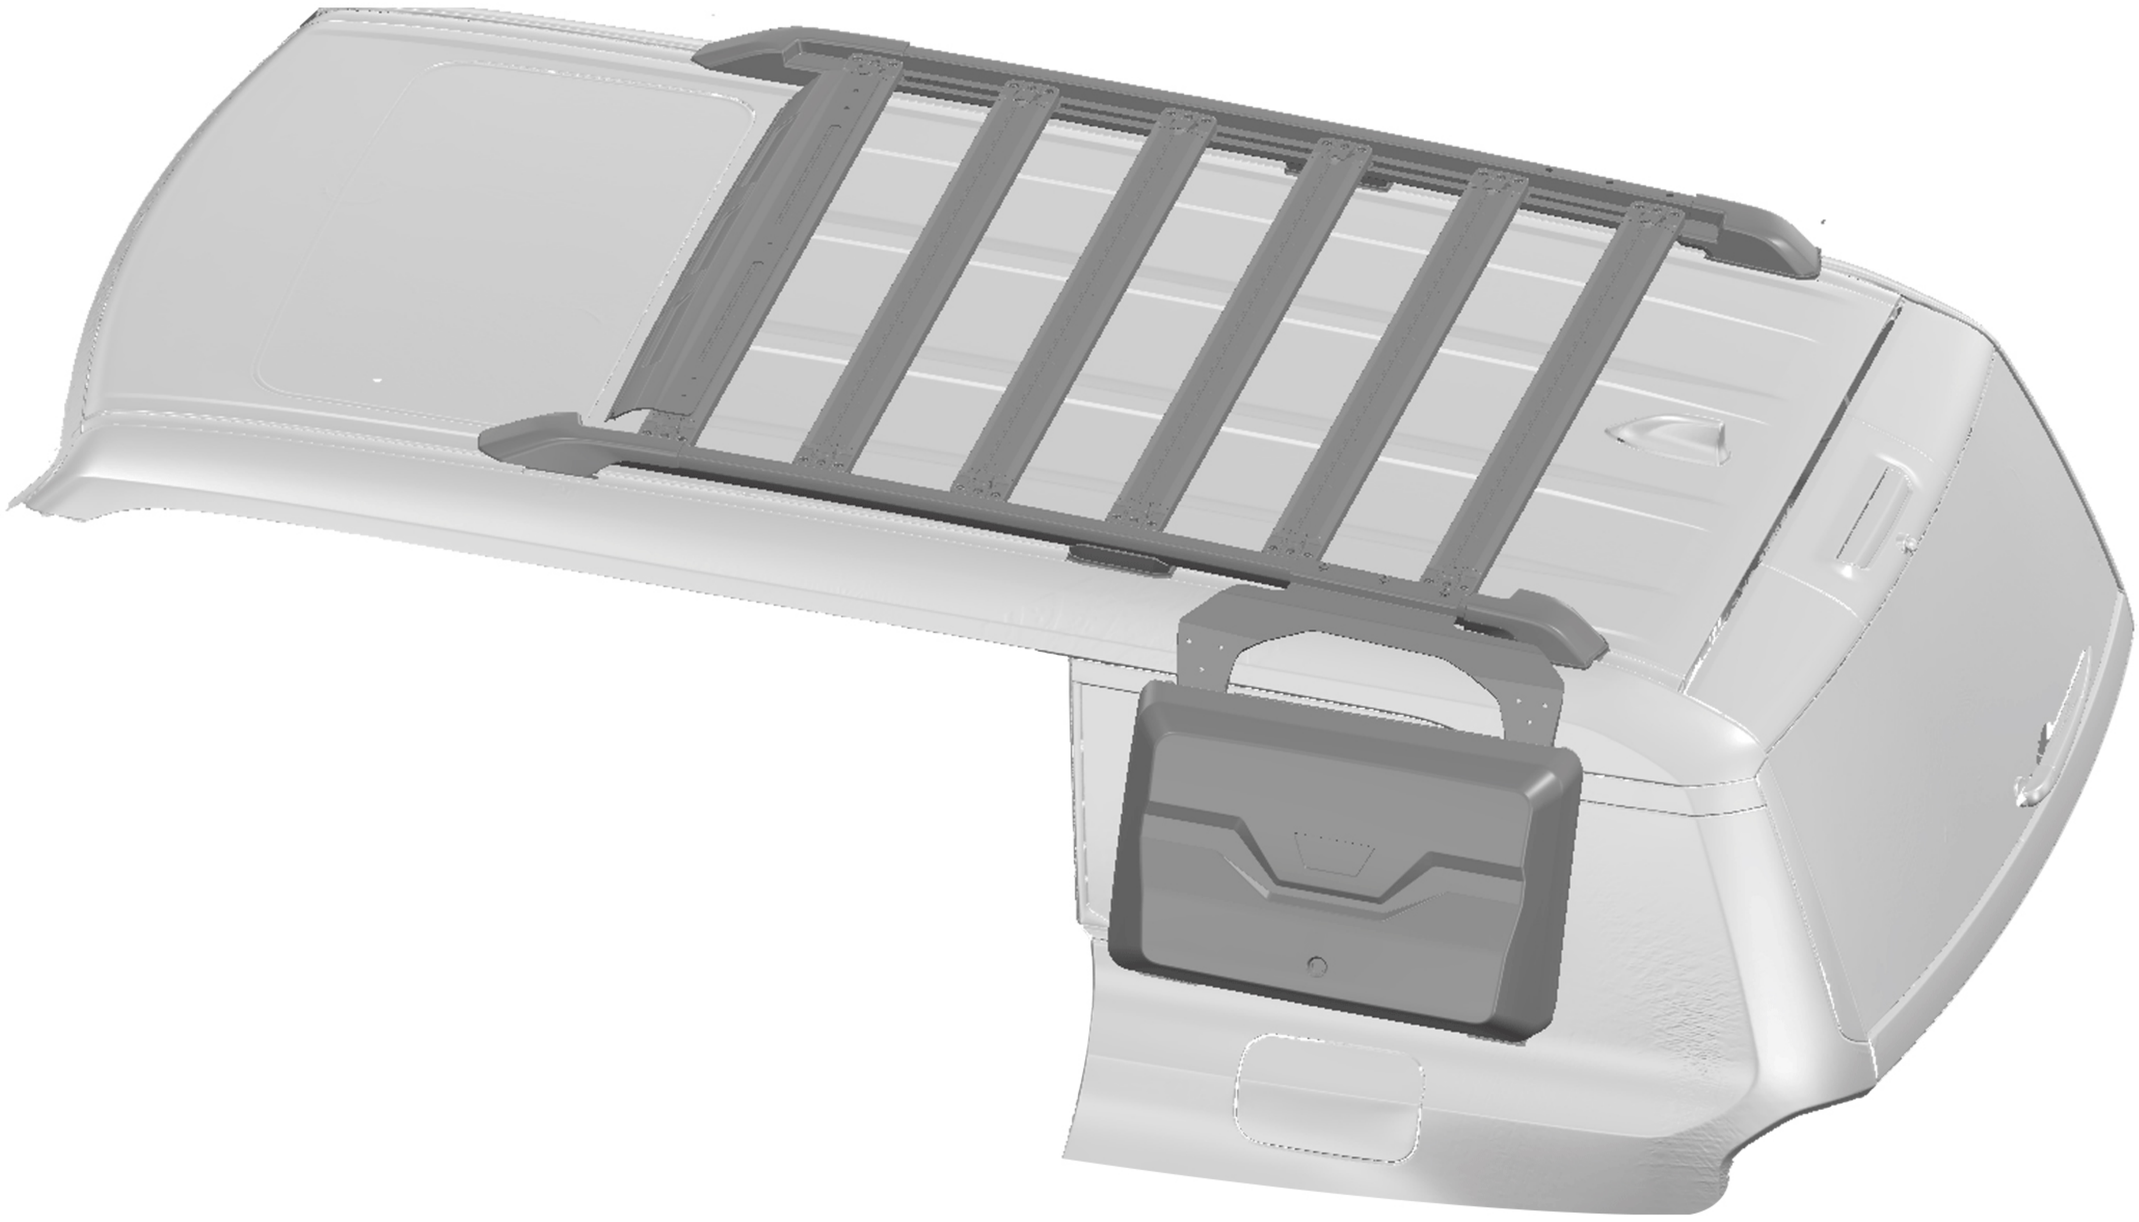

INFORMATION


The information in these installation instructions is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely install equipment in your vehicle. These procedures should not be attempted by individuals without professional expertise or by "do-it-yourselfers."

WARNING ⚠

It is critical that all products are properly and securely assembled and attached to your vehicle. Improper attachment could result in an automobile accident, causing serious bodily injury or death. You are responsible for assembling and securing all components to your vehicle, checking the attachments prior to use, and periodically inspecting the products for adjustment, wear, and damage.
Therefore, you must read and understand all instructions and precautions supplied with your product prior to installation or use. If you do not understand all instructions and cautions, or if you lack mechanical experience and are not thoroughly familiar with the installation procedures, you should have the product installed by a professional installer or other qualified personnel.

NOTE: We will not be responsible for any damage caused by the failure to install the product according to these instructions. If you have any questions about the installation of this product, please contact us for assistance.


1 PARTS LIST

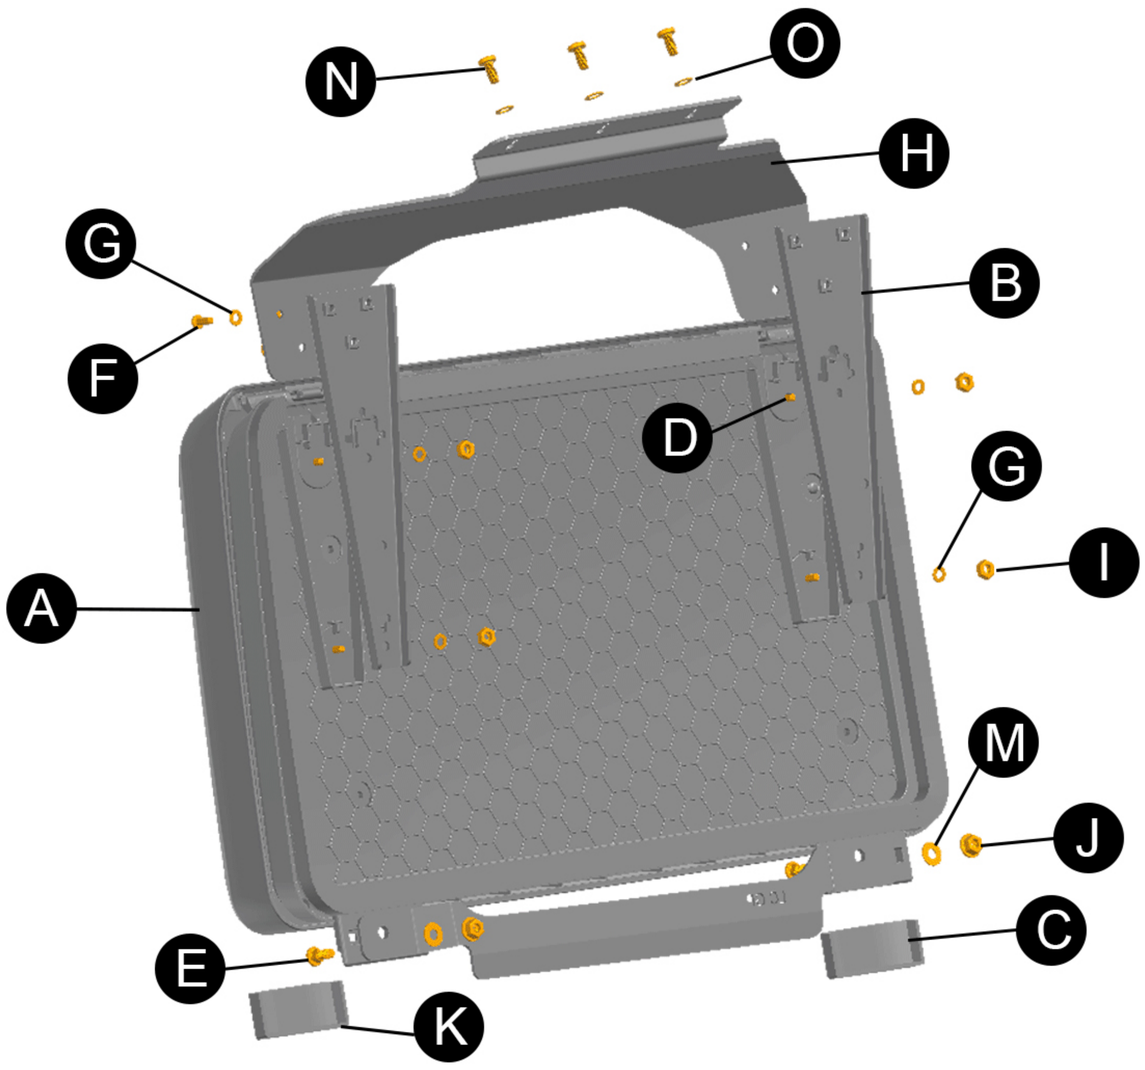

	QTY	NAME
A	x 1	Storage Box (Bag)
B	x 2	Mounting Bracket (L&R)
C	x 1	Lower Bracket
D	x 4	M6*20 Torx Screws
E	x 2	M8*20 Square Screws
F	x 6	M6*14 Torx Screws
G	x 10	M6 Gasket
H	x 1	Upper Bracket
I	x 4	M6 Lock Nut
J	x 2	M8 Flange Nut
K	x 2	Lid
L	x 1	T45 Wrench
M	x 2	M8 Gasket
N	x 3	M8*16 Torx Screws
O	x 3	8x14 Flat Gaskets


2 INSTALLATION STEPS

Figure 2.1

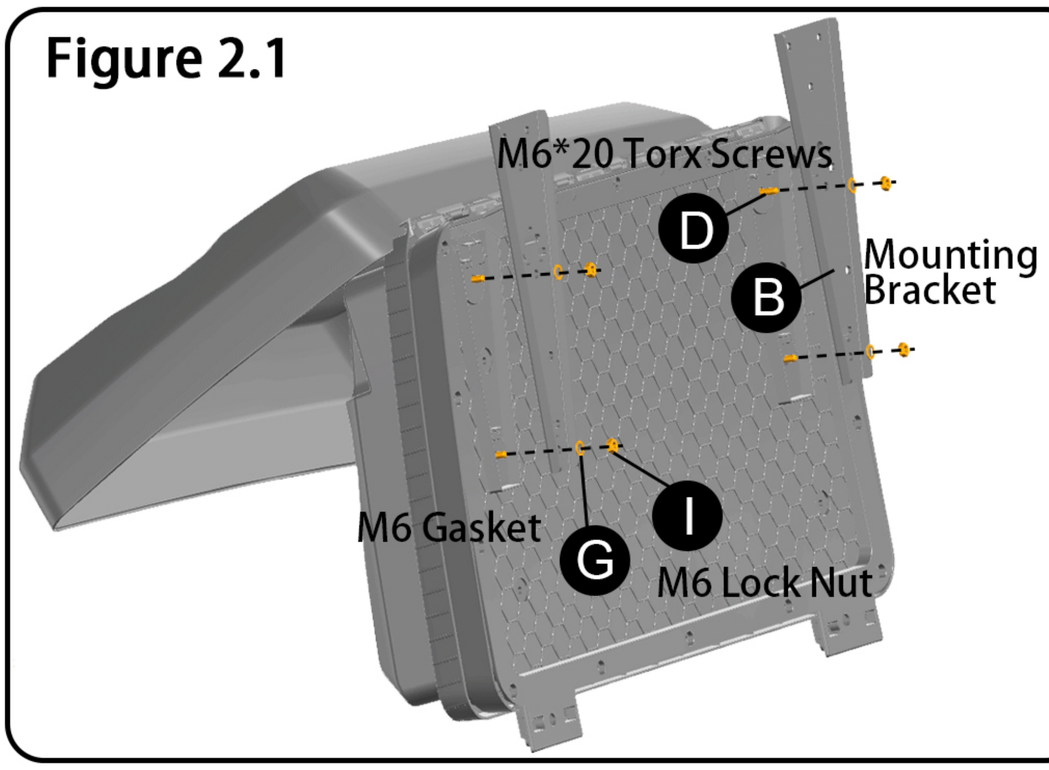


1.Open the Storage Box (A) and insert the M6*20 Torx Screws (D) into the pre-drilled holes inside the box.
2.Align the Mounting Brackets (B) with the screw holes, then attach them using the M6 Flat Gaskets (G) and M6 Lock Nuts (I). Tighten the screws securely.

Figure 2.2

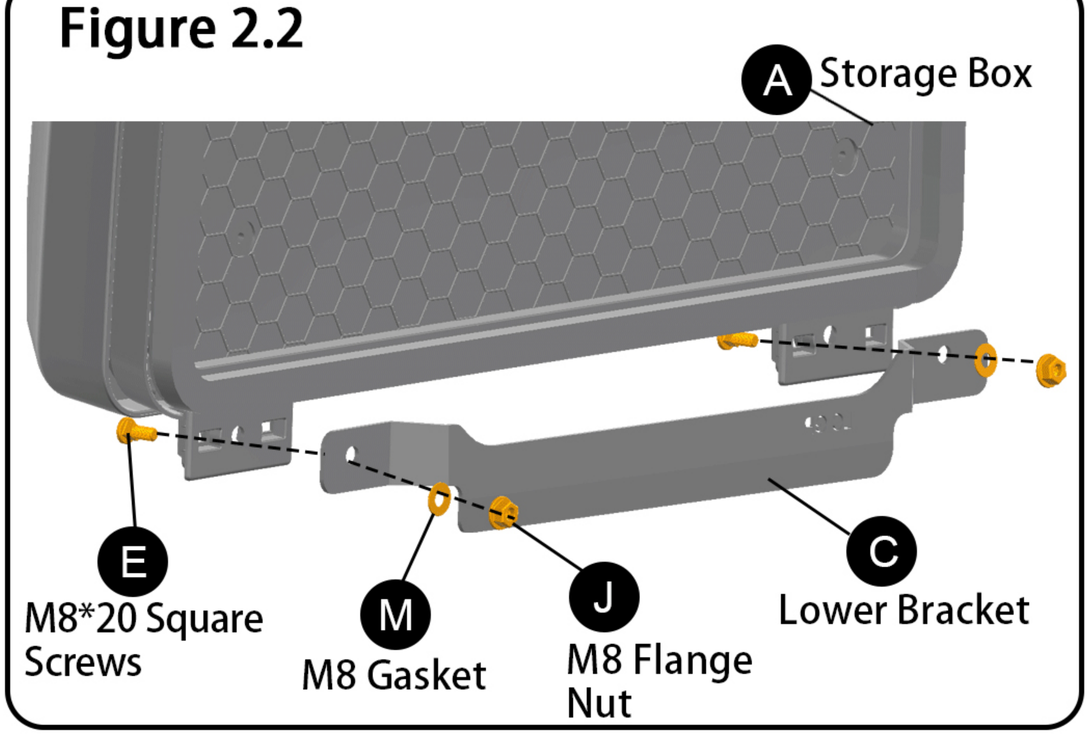


1.Attach the Lower Bracket (C) to the base of the Storage Box (A).
2.Secure the bracket using M8*20 Square Screws (E), M8 Gaskets (M), and M8 Flange Nuts (J). Ensure all connections are tight and secure.

Figure 2.3

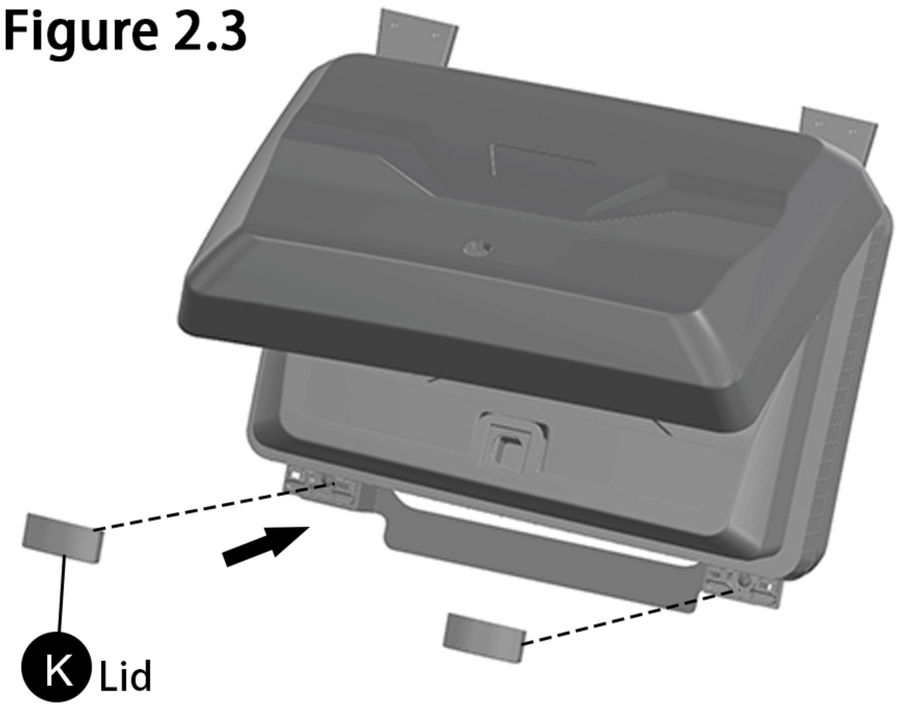


1.Install the Lid (K) onto the top of the Storage Box (A) as shown.
2.Ensure the lid is properly closed and securely attached.

Figure 2.4

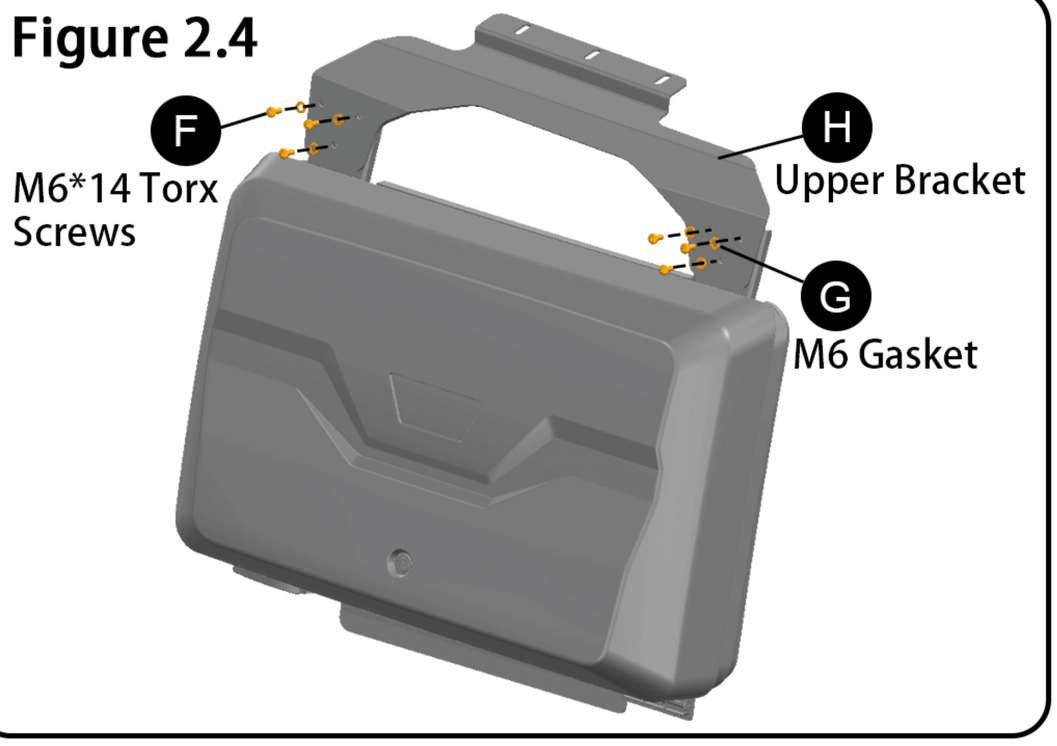


1.Attach the Upper Bracket (H) to the Storage Box (A) using M6*14 Torx Screws (F) and M6 Flat Gaskets (G).
2.Ensure the bracket is aligned correctly and the screws are fully tightened.

Figure 3.1

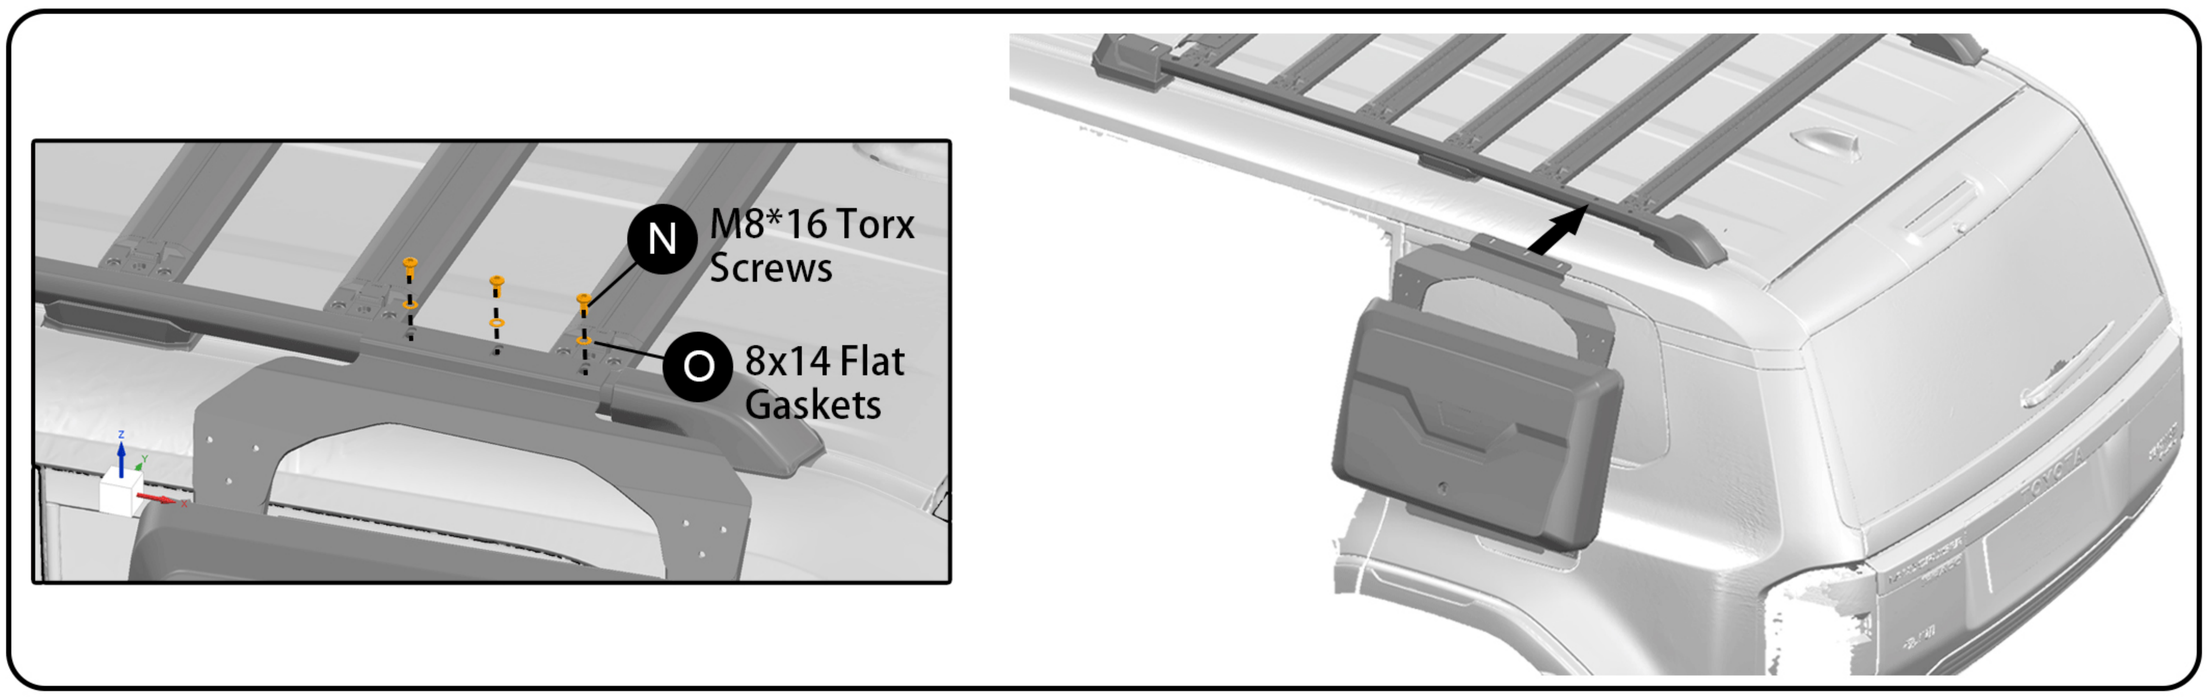


1.Place the Storage Box (A) onto the luggage platform, aligning it with the pre-drilled holes.
2.Use the M8*16 Torx Screws (N) and 8x14 Flat Gaskets (O) to secure the box in place. Tighten the screws firmly.

Figure 3.2

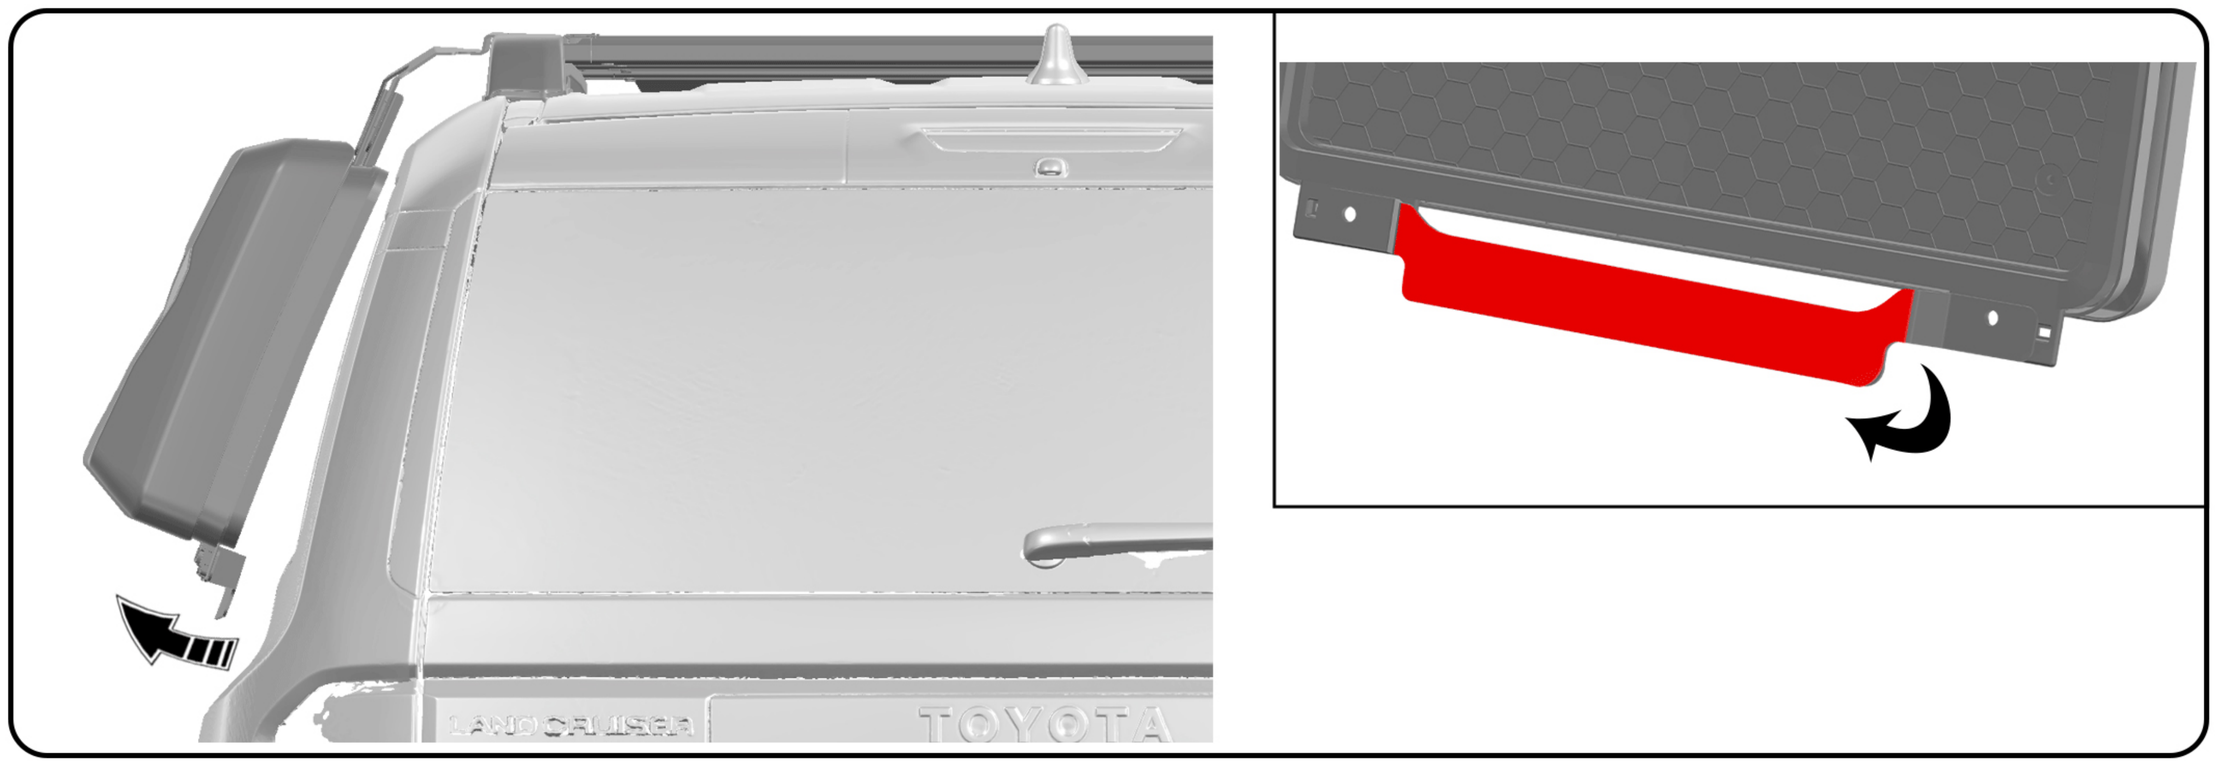

1.Gently pull the bottom of the Storage Box (A) outward to adjust its position slightly.
2.Remove the protective film from the adhesive backing on the lower bracket, then carefully attach the box to the vehicle body. Press firmly to secure the adhesive bond.
3.Ensure the Lower Bracket (C) does not interfere with the fuel tank cover or any functional components.

Figure 3.3

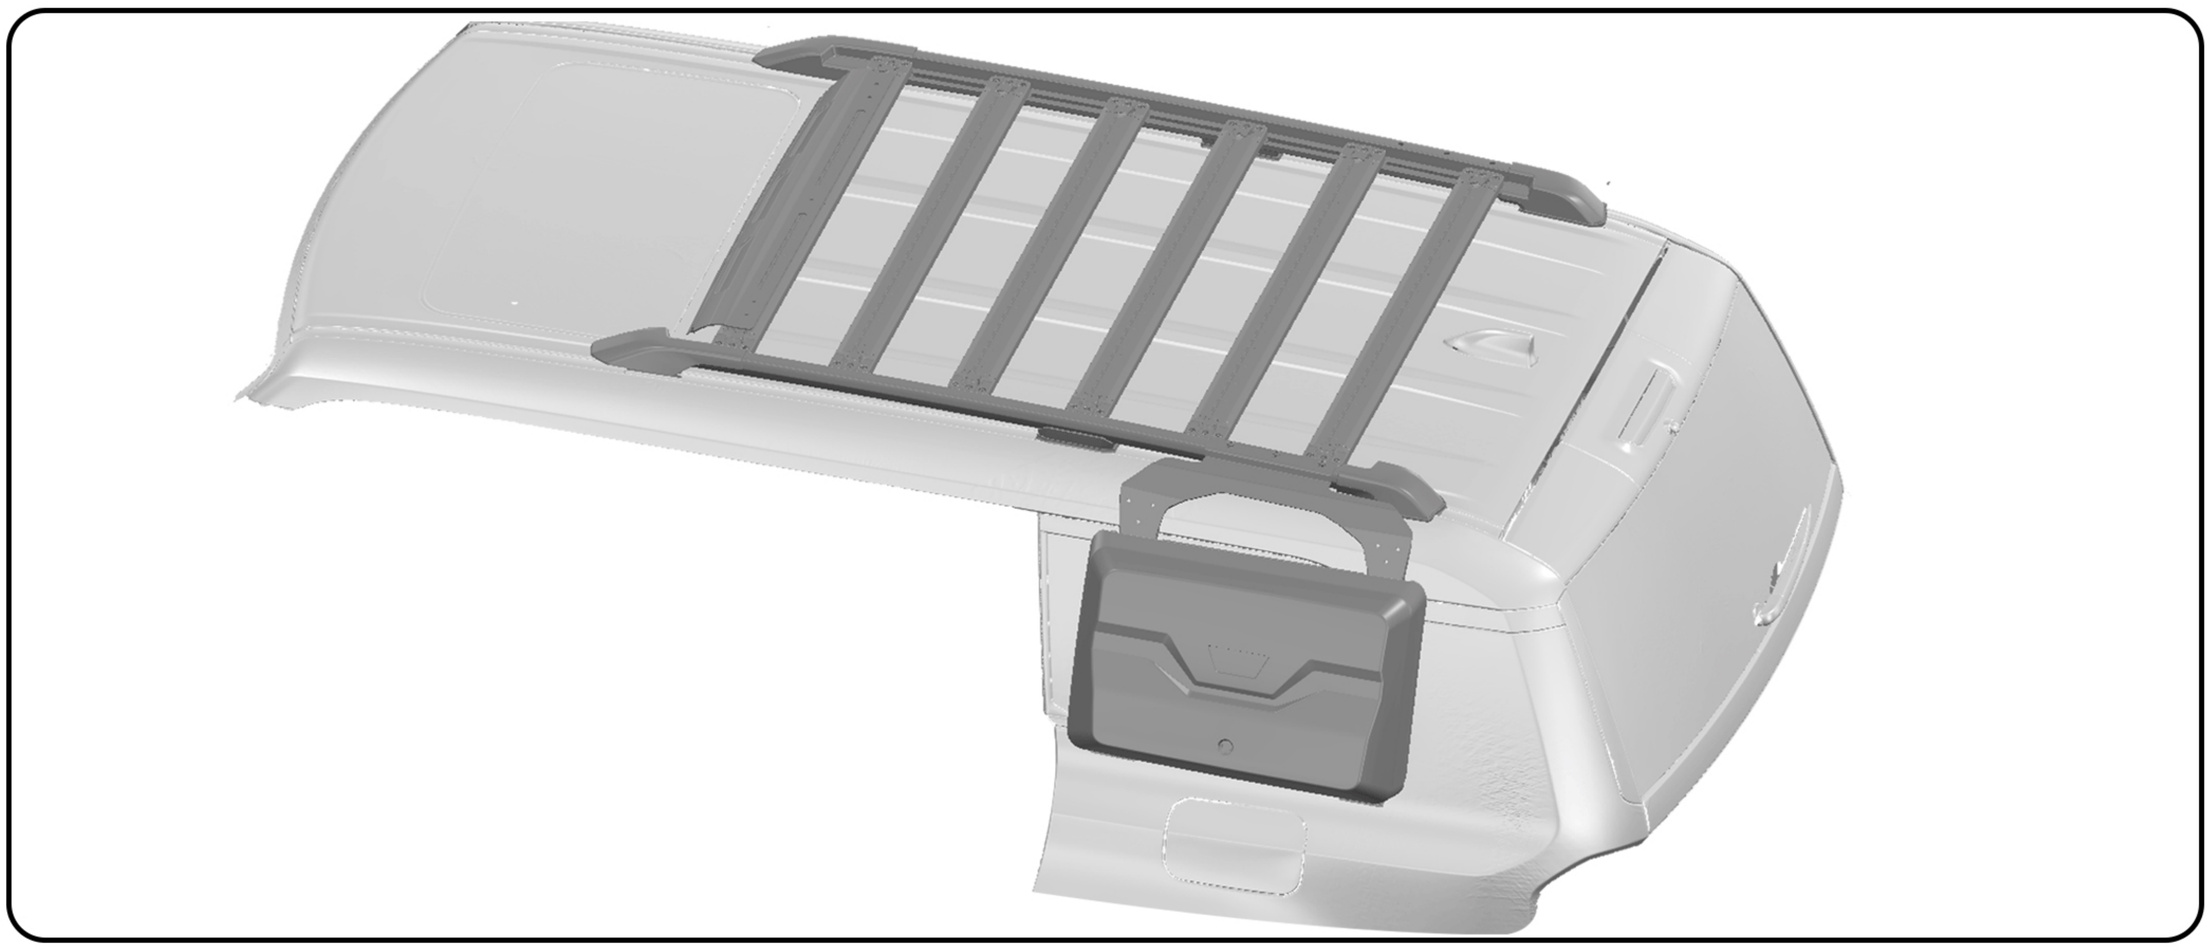

Verify that the Storage Box (A) is securely connected to both the platform and the vehicle body.
The installation is now complete.

Notes:

1.During installation, ensure all screws and gaskets are firmly tightened to prevent loosening during use.
2.Regularly check the stability of the storage box and brackets to ensure safety.
3.Avoid over-tightening screws to prevent damage to the components.